




VENTILATORI CENTRIFUGHI SERIE G2E


Monoaspirazione

ebmpapst

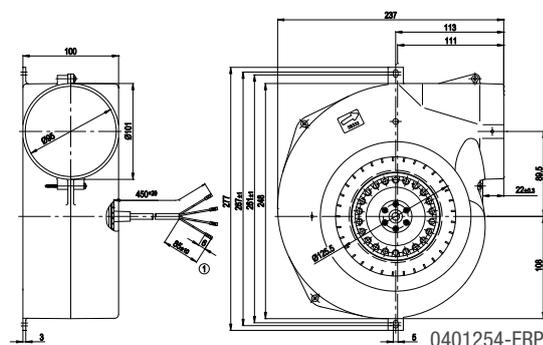

COCLEA IN ALLUMINIO

MODELLO	ALIM.	V	HZ	m ³ /h	rpm	W	A	μF	dB	H	I	L	O	COD	€
G2E160AY5091	Monofase	230	50	600	2100	240	1.05	6	72	130	100	103	175	0401254-ERP	504,00
G2D160AF0201	Trifase	400	50	690	2300	320	0.5	-	76	130	100	103	175	0401255	481,32

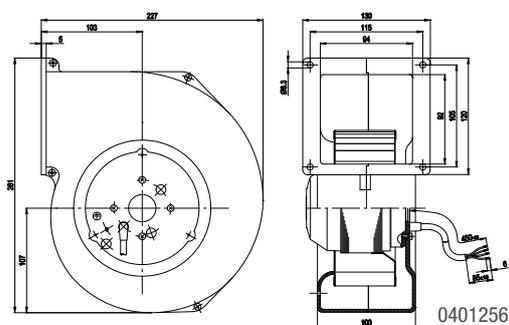

COCLEA IN PLASTICA

MODELLO	ALIM.	V	HZ	m ³ /h	rpm	W	A	μF	dB	COD	€
G2E140NS3801	Monofase	230	50	370	1650	105	0.46	2	59	0401256	239,40

DESCRIZIONE:

Ventilatori centrifughi per impieghi generici, portate d'aria da 80 a 485 m³/h, motori monofase o trifase, con rotore esterno 2 poli con condensatore permanente.

Girante costruita in metallo, chiocciola in alluminio pressofuso ad eccezione del modello NS che è in nylon caricato vetro.

SEMPLICE ASPIRAZIONE CON PALE AVANTI

In caso di cambio dalla normativa Vi verrà proposto il ventilatore sostitutivo