
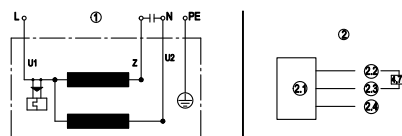
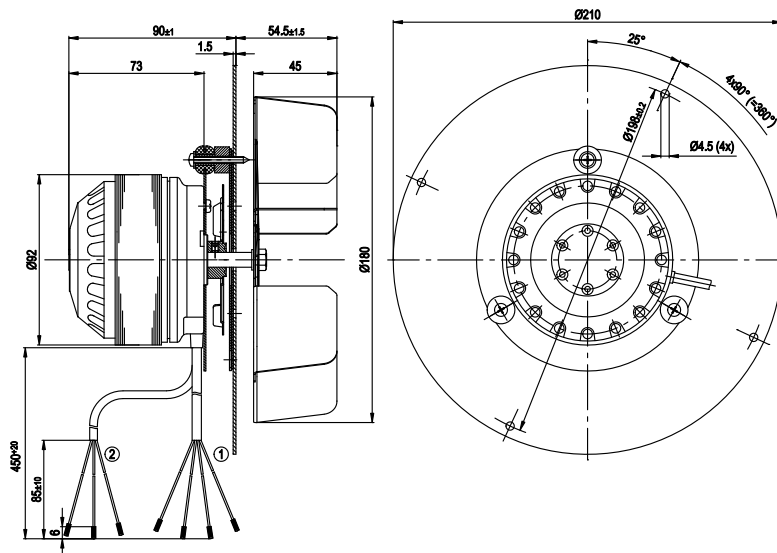


ebmpapst

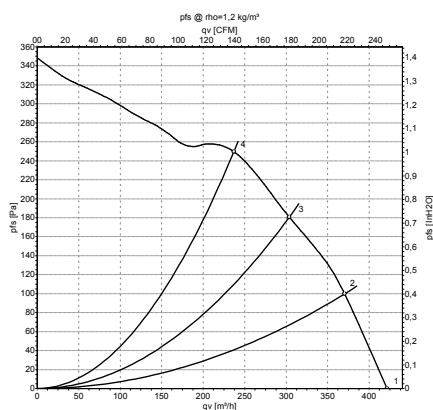

	V	HZ	rpm	W	A	m³/h	PA
1	230	50	2530	68	0,30	420	0
2	230	50	2520	68	0,30	370	100
3	230	50	2540	33	0,29	305	180
4	230	50	2590	62	0,27	235	250

- | | |
|-----|--------------------|
| 1 | Schema ventilatore |
| U1 | Blu |
| Z | Marrone |
| U2 | Nero |
| PE | Giallo/verde |
| 2 | Circuito impianto |
| 2.1 | Circuito impianto |
| 2.2 | Rosso (+5V) |
| 2.3 | Bianco (out) |
| 2.4 | Nero (0V) |

FASI	V/Hz	rpm	W	A	µF	TEMP. AMBIENTE min. °C	TEMP. AMBIENTE max °C	COD	€
1~	230/50	2530	68	0,30	2	-25	60	0411905	504,00

A richiesta una ancor più ampia offerta dedicata al mondo del pellet