


ESTRATTORI DA MURO

CV/KV 125 A/C


ÖSTBERG
HEALTHY INDOOR CLIMATE
WITH ENERGY EFFICIENT VENTILATION

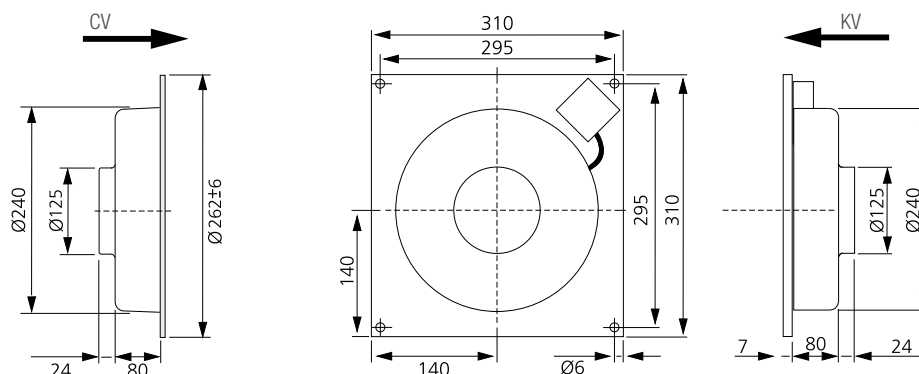

DATI TECNICI

MOD.	V/Hz	A	W	rpm	kg	SCHEMA elettrico	µF	CLASSE ISOLAM. motore	PROTEZ. motore	COD	€
CV 125C	230/50-60	0,18	62	1640	2,2	4040002	2	F	IP 44	0411919	157,50
KVFU 125C	230/50-60	0,27	62	2480	2,2	4040001	2	F	IP 44	0411920	178,50


PRESSIONE/FLUSSO

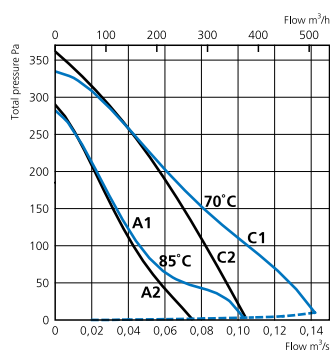

DATI ACUSTICI

CV/KV 125 A, 40 l/s 130 Pa	L _{PA}	L _{WA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
AMBIENTE	36	43	35	20	35	34	38	38	36	30
INGRESSO		67	44	51	66	60	56	52	47	39
CV/KV 125 C, 80 l/s 145 Pa	L _{PA}	L _{WA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
AMBIENTE	42	49	36	25	39	39	44	43	45	36
INGRESSO		70	49	55	64	67	64	60	55	48

POTENZA/FLUSSO



DESCRIZIONE:

Ventilatori da parete per tubi a sezione circolare, con o senza piastra quadrata.

T MAX aria trasportata in gradi centigradi = 70.