


MOTOPROTETTORI KLIXON MINIATURIZZATI



Portata 13A 250 Volt

UL US YZFW2.E15962 - YZFW8.E15962

SERIE 9700 K

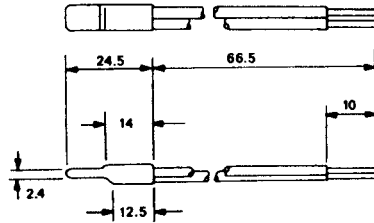

TEMPERATURA APERTURA $\pm 5^\circ\text{C}$	Modello	pz	COD	€
75°	9700K 51-11	6	3313310	4,19
90°	9700K 21-11	6	3313311	
105°	9700K 16-11	6	3313314	
115°	9700K 41-11	6	3313315	
120°	9700K 01-11	6	3313316	
130°	9700K 11-11	6	3313317	
135°	9700K 06-11	6	3313318	
150°	9700K 46-11	6	3313322	
120°	9700K 02-11	6	3313340	
130°	9700K 15-11	6	3313320	

SERIE 15 AM

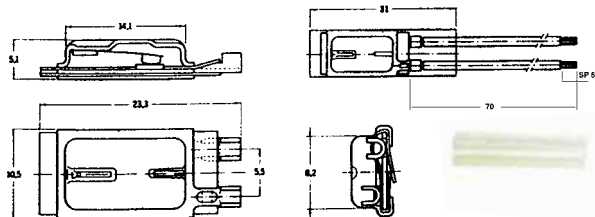


TABELLA DELLE TEMPERATURE D'INTERVENTO

Resistività del contatto bimetallico in OHMS/CMF	30	70	100	250	500	MODELLO	pz	COD	€
90°C						15AM 036	6	3313325-70	4,19
105°C						15AM 071	6	3313326-70	
120°C						15AM 121	6	3313327-70	
TEMPERATURA NOMINALE DI INTERVENTO °C			amperometrico 120°C			15AM 122	6	3313328-70	
TOLLERANZA $\pm 5^\circ\text{C}$					amperometrico 120°C	15AM 124	6	3313329-70	
130°						15AM 151	6	3313330-70	
140°						15AM 181	6	3313331-70	
150°						15AM 211	6	3313332-70	
170°						15AM 550	6	3313333-70	
160°						15AM 530	6	3313335-70	