


PRESSACAVI PLASTICA

CE



PRESSACAVO - PASSO PG DIN 40 430



AG	∅	GL	∅k	H	COD	€/pz
PG 7	15	8	3,5-6	20	3307032	0,49
PG 9	19	8	4,5-7	21	3307033	0,49
PG 11	22	8	6-9	22	3307034	0,51
PG 13,5	24	9	9-12	26	3307035	0,54
PG 16	27	10	11-14	28	3307036	0,63
PG 21	33	11	14-18	32	3307037	0,99
PG 29	42	11	18-25	35	3307038	1,93
PG 36	54	13	25-32	44	3307039	3,98
PG 42	60-55	13	30-38	44	3307040	12,78
PG 48	65-60	14	34-42	44	3307041	9,68

misure in mm.



CONTRODADO - PASSO PIG DIN 40 430

IG	∅	H	COD	€/pz
PG7	19	5	3307042	0,20
PG9	22	5	3307043	0,20
PG11	24	5	3307044	0,20
PG13,5	27	6	3307045	0,22
PG16	30	6	3307046	0,23
PG21	36	7	3307047	0,35
PG29	46	7	3307048	0,63
PG36	60	8	3307049	1,03
PG42	65	8	3307050	1,64
PG48	70	8	3307051	2,13

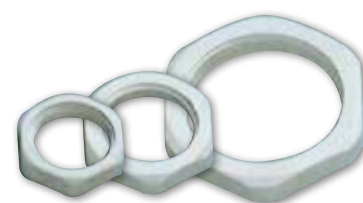

N.B. Il controddado è sempre fornito separatamente e solo su richiesta.
misure in mm. Confezioni pezzi singoli

Materiale plastico antiurto
con guarnizioni in gomma

Temperatura di esercizio -30°C +60°C
Grado di protezione IP 54