


PRESSACAVI OTTONE



PRESSACAVO - PASSO GAS ISO 228/1




P	Ø A (Min-max)	Foro Fissaggio	B	C	COD	€/pz
1/4"	5-7	13,5	15	6	3307052	3,33
3/8"	7-9	17	20	6	3307053	4,36
1/2"	11-13	21,5	24	7	3307054	5,50
5/8"	13-15	23,5	26	7	3307055	6,53
3/4"	15-17	27	30	8	3307056	9,88
1"	20-22	33,5	36	9	3307057	10,39
1"1/8	23-25	38	40	11	3307058	12,22
1"1/4	26-32	42	44	11	3307059	14,47
1"1/2	32-35	48	52	11	3307060	17,60
2"	40-42	60	64	13	3307061	27,29
2"1/2	55-57	76	80	20	3307062*	258,48

misure in mm. Confezioni pezzi singoli
*ad esaurimento

CONTRODADO - PASSO GAS ISO 228/1

P	A	H	COD	€/pz
1/4"	15	3	3307064	0,53
3/8"	19	3	3307065	0,74
1/2"	24	3,5	3307066	0,96
5/8"	27	4	3307067	1,19
3/4"	30	4	3307068	1,38
1"	37	4	3307069	2,03
1" 1/8	41	4,5	3307070	2,25
1" 1/4	45	4,5	3307071	3,27
1" 1/2	52	5,5	3307072	4,30
2"	64	6	3307073	5,05
2" 1/2	83	7	3307074*	30,83

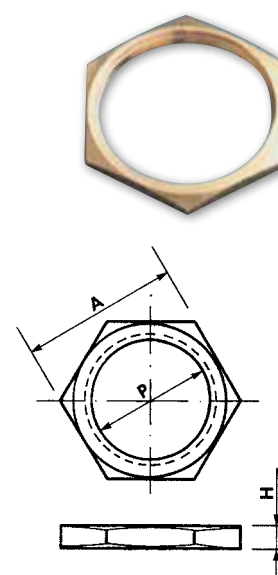

Ottone nichelato; Confezioni: pezzi singoli. N.B. Il controdado è sempre fornito separatamente e solo su richiesta.
*ad esaurimento

Ottone OT 58
Grado di protezione IP 54
Dimensioni a norme DIN 46 320