

ELETTROPOMPE A IMMERSIONE SERIE SPV



Motore trifase 230/400 V 50Hz
Isolamento classe F - Protezione IP55
Corpo motore in alluminio e pescante in policarbonato







SPV50-75

SPV100-150

► Tipo	KW	C	ØD gas	ØE	ØF	ØG	H	ØI	ØL	A	B	COD	€
SPV 33	0,36	210	3/4"	98	100	130	170	115	7	300	90	0501138	368,48
										330	120	0501139	
										380	170	0501140	
										430	220	0501141	
										480	270	0501142	
SPV 50	1,00	240	1 1/4"	138	140	180	215	160	9	460	200	0501144	598,21
										530	270	0501146	
										610	350	0501147	
SPV 75	1,25	240	1 1/4"	138	140	180	215	160	9	460	200	0501153	643,90
										530	270	0501155	
										610	350	0501157	
SPV 100	1,01	300	1 1/4"	138	140	180	230	160	9	500	200	0501169	905,96
										570	270	0501170	
										650	350	0501171	
SPV 150	1,41	300	1 1/4"	138	140	180	230	160	9	500	200	0501174	947,42
										570	270	0501175	
										650	350	0501176	

confezioni singoli pezzi, misure in mm

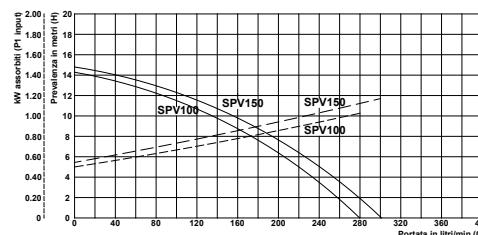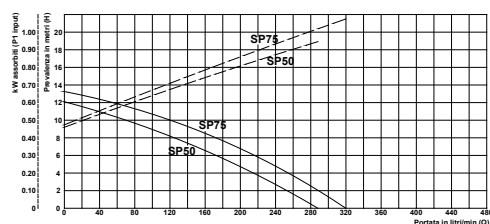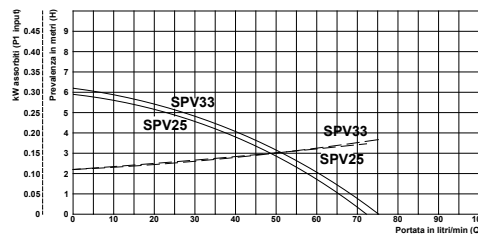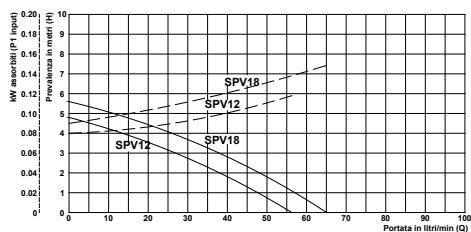

CURVE DI PORTATA I dati riportati nei diagrammi sono riferiti ad una viscosità non superiore a 5 CST 20°C