



ELECTRIC PUMPS RX 2-3-4-5



“VORTEX” submersible

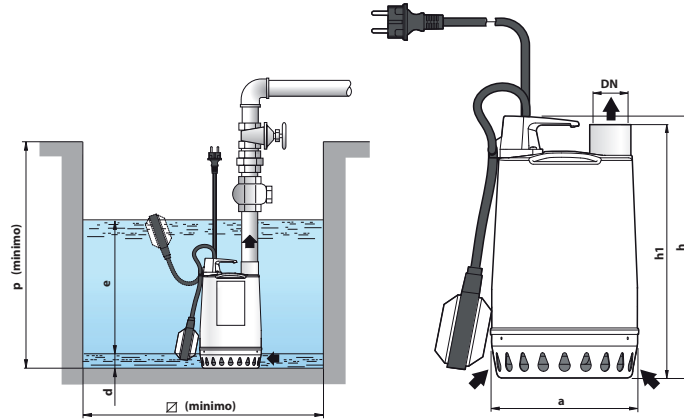

Model	KW	Hp	Delivery head intake	Power cable m	CODE	€
Single-phase	0.37	0.50	1¼"	5	P-RXm 2/20	198.00
Single-phase	0.55	0.75	1¼"	5	P-RXm 3/20	213.00
Single-phase	0.75	1	1½"	10	P-RXm 4/40	548.00
Three-phase	0.75	1	1½"	10	P-RX 4/40	558.00
Single-phase	1.1	1.5	1½"	10	P-RXm 5/40	570.00
Three-phase	1.1	1.5	1½"	10	P-RX 5/40	570.00

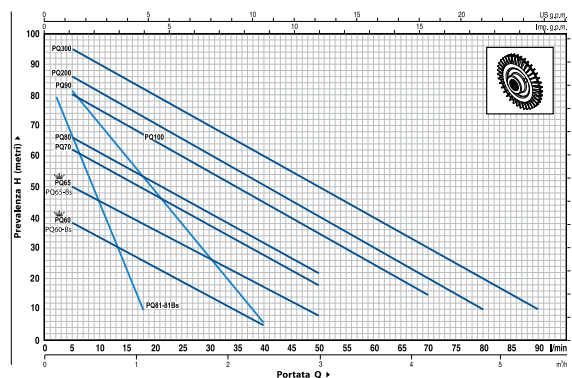

PERFORMANCE CURVES AND DATA 50 Hz n=2900 1/min

Pumped liquid: sewage water drainage
Use: civil, industrial
Type: submersible
Technique: vortex

PERFORMANCE RANGE

- Flow rate up to 380 l/min (22.8 m³/h)
- Head up to 13 m

LIMITS OF USE

- Depth of use below the water level up to 10 m
- Temperature of the liquid up to +50 °C (Temperature of the liquid up to +90 °C for intermittent operation of a maximum of 3 minutes)
- Passage of suspended solid objects:
 - Up to Ø 20 mm for RX 2/20, RX 3/20
 - Up to Ø 40 mm for RX 4/40, RX 5/40
- Emptying level:
 - Up to 25 mm from the bottom for RX 2/20, RX 3/20

- Up to 50 mm from the bottom for RX 4/40, RX 5/40
- Continuous operation S1

N.B.: All models are also available with 10 m cable.

Prices valid at the time of printing of the catalogue, and subject to changes by the manufacturer. For up-to-date prices and applied discounts on the products listed on this page, please contact our sales office Tel. 02 89231200 - faet@faet.it - Fax 02 89231230