



ELECTRIC PUMPS RX SERIES

Submersible drainage

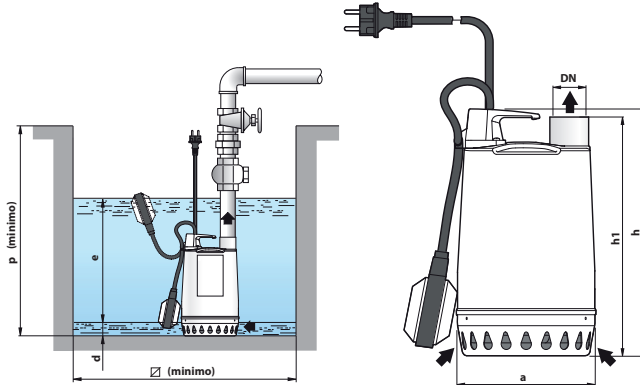

Model	KW	Hp	Delivery head intake	Power cable m	CODE	€
Single-phase	0.25	0.33	1¼	5	P-RXm 1	185.00
Single-phase	0.37	0.50	1¼	5	P-RXm 2	191.00
Single-phase	0.55	0.75	1¼	5	P-RXm 3	202.00
Three-phase	0.75	1	1½	10	P-RX 4	535.00
Single-phase	0.75	1	1½	10	P-RXm 4	525.00
Three-phase	1.1	1.5	1½	10	P-RX 5	548.00
Single-phase	1.1	1.5	1½	10	P-RXm 5	548.00

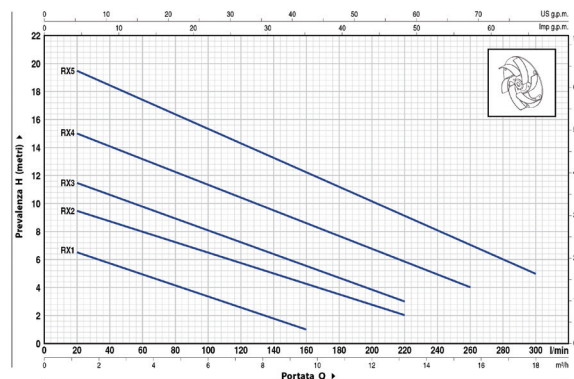

PERFORMANCE CURVES AND DATA 50 Hz n=2900 1/min

Pumped liquid: white water drainage
Use: domestic, civil
Type: submersible
Technique: centrifugal

PERFORMANCE RANGE

- Flow rate up to (18 m³/h) 300 l/min
- Head up to 20 m

LIMITS OF USE

- Depth of use below the water level up to 10 m
- Temperature of the liquid up to +50 °C (Temperature of the liquid up to +90 °C for intermittent operation of a maximum of 3 minutes)
- Passage of suspended solid objects up to Ø 10 mm
- Emptying level:
 - up to 14 mm from the bottom for RX 1-2-3

- up to 25 mm from the bottom for RX 4-5
- Continuous operation S1

N.B.: Models P-RXM 1160, P-RXM 2168 and P-RXM 3128 are also available with 10 m cable.

Prices valid at the time of printing of the catalogue, and subject to changes by the manufacturer. For up-to-date prices and applied discounts on the products listed on this page, please contact our sales office Tel. 02 89231200 - faet@faet.it - Fax 02 89231230

MECHANICAL SEALS

PUMPS

EXTRACTOR FANS

MOTORS

INSULATION

EQUIPMENT

MOTOR PARTS

TOOL PARTS

SWITCHES