



# ELECTRIC PUMPS VX-ST SERIES

*"VORTEX" submersible*

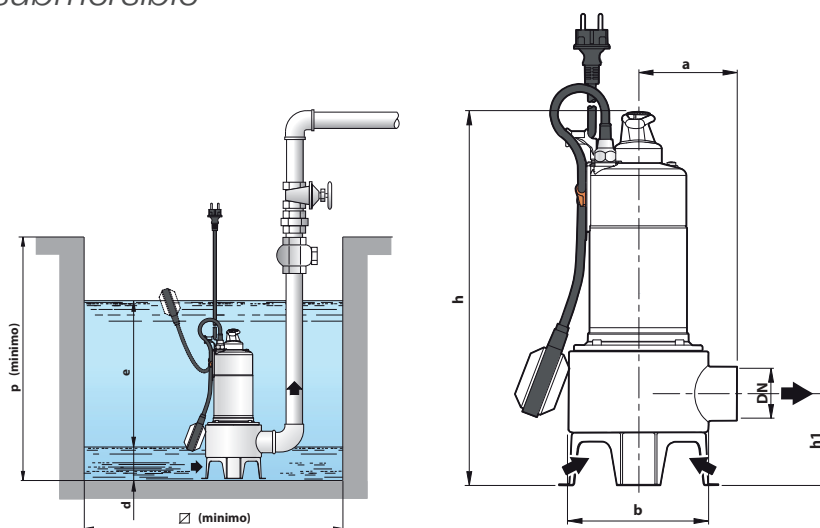

| Model        | KW   | Hp   | Delivery head intake | Power cable m | CODE                  | €             |
|--------------|------|------|----------------------|---------------|-----------------------|---------------|
| Single-phase | 0.55 | 0.75 | 1½                   | 5             | <b>P-VXm 8/35-ST</b>  | <b>330.00</b> |
| Single-phase | 0.55 | 0.75 | 2                    | 5             | <b>P-VXm 8/50-ST</b>  | <b>340.00</b> |
| Three-phase  | 0.75 | 1    | 1½                   | 5             | <b>P-VX 10/35-ST</b>  | <b>349.00</b> |
| Single-phase | 0.75 | 1    | 1½                   | 5             | <b>P-VXm 10/35-ST</b> | <b>334.00</b> |
| Three-phase  | 0.75 | 1    | 2                    | 5             | <b>P-VX 10/50-ST</b>  | <b>359.00</b> |

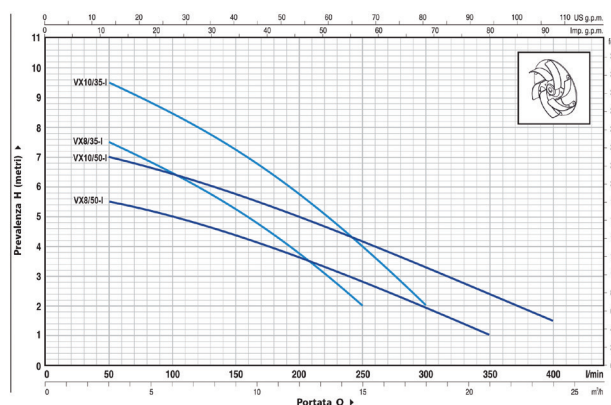

PERFORMANCE CURVES AND DATA 50 Hz n=2900 1/min

Pumped liquid: sewage water drainage  
Use: domestic, civil, industrial  
Type: submersible  
Technique: vortex

#### PERFORMANCE RANGE

- Flow rate up to (24 m³/h) 400 l/min
- Head up to 10 m

#### LIMITS OF USE

- Depth of use below the water level  
Up to 5 m
- Temperature of the liquid up to +40 °C
- Passage of suspended solid objects:
  - up to Ø 40 mm for VX8/35I - VX10/35I
  - up to Ø 50 mm for VX8/50I - VX10/50I

- For continuous service, minimum immersion:
  - up to 270 mm for VX8/35I - VX10/35I
  - up to 300 mm for VX8/50I - VX10/50I

N.B.: All models are also available with 10 m cable.

Prices valid at the time of printing of the catalogue, and subject to changes by the manufacturer. For up-to-date prices and applied discounts on the products listed on this page, please contact our sales office Tel. 02 89231200 - faet@faet.it - Fax 02 89231230