



ELECTRIC PUMPS VX SERIES

"VORTEX" submersible

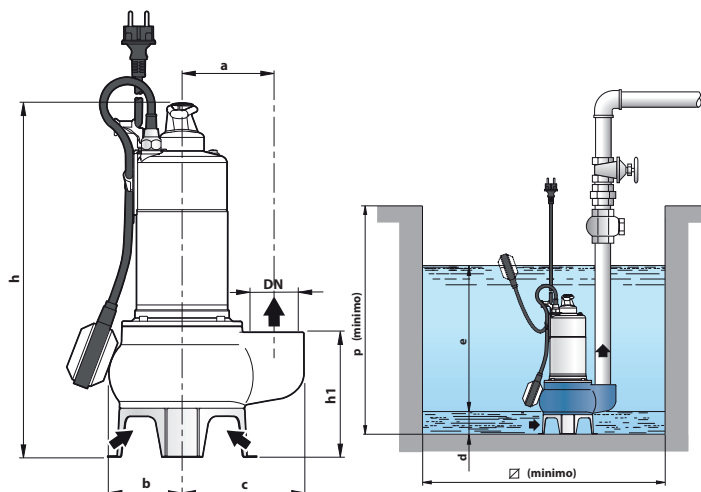

Model	KW	Hp	Delivery head intake	Power cable m	CODE	€
Single-phase	0.55	0.75	1½	5	P-VXm 8/35	282.00
Single-phase	0.55	0.75	2	5	P-VXm 8/50	293.00
Single-phase	0.75	1	1½	5	P-VXm 10/35	287.00
Three-phase	0.75	1	1½	5	P-VX 10/35	302.00
Single-phase	0.75	1	2	5	P-VXm 10/50	298.00
Three-phase	0.75	1	2	5	P-VX 10/50	313.00
Single-phase	1.1	1.5	1½	10	P-VXm 15/35	338.00
Three-phase	1.1	1.5	1½	10	P-VX 15/35	338.00
Three-phase	1.1	1.5	2	10	P-VX 15/50	348.00

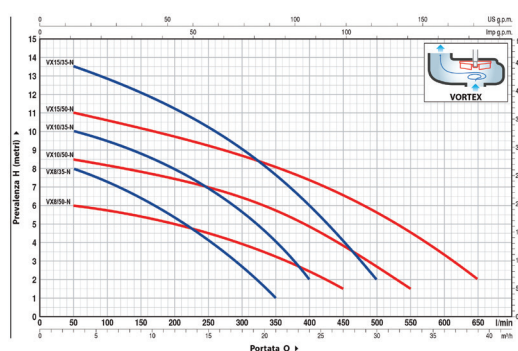

PERFORMANCE CURVES AND DATA 50 Hz n=2900 1/min

Pumped liquid: sewage water drainage
Use: domestic, civil, industrial
Type: submersible
Technique: vortex

PERFORMANCE RANGE

- Flow rate up to (24 m³/h) 400 l/min
- Head up to 10 m

LIMITS OF USE

- Depth of use below the water level up to 5 m
- Temperature of the liquid up to +40 °C
- Passage of suspended solid objects:
 - up to Ø 40 mm for VX8/35l - VX10/35l
 - up to Ø 50 mm for VX8/50l - VX10/50l

- For continuous service, minimum immersion:
 - up to 270 mm for VX8/35l - VX10/35l
 - up to 300 mm for VX8/50l - VX10/50l

N.B.: Codes with 5 m cable are also available with 10 m cable.

Prices valid at the time of printing of the catalogue, and subject to changes by the manufacturer. For up-to-date prices and applied discounts on the products listed on this page, please contact our sales office Tel. 02 89231200 - faet@faet.it - Fax 02 89231230