



ELECTRIC PUMPS

MC 50 SERIES

DOUBLE CHANNEL submersible

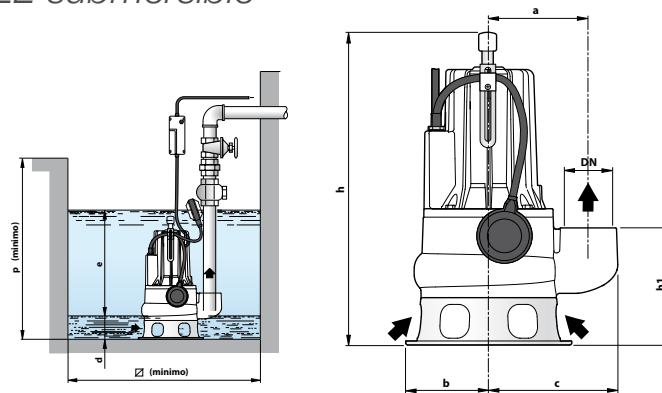

Model	KW	Hp	Delivery head intake	Power cable m	CODE	€
Single-phase	1.1	1.5	2½"	10	P-MCm 15/50	740.00
Three-phase	1.1	1.5	2½"	10	P-MC 15/50	740.00
Single-phase	1.5	2	2½"	10	P-MCm 20/50	780.00
Three-phase	1.5	2	2½"	10	P-MC 20/50	756.00
Single-phase	2.2	3	2½"	10	P-MCm 30/50+PANEL	1277.00
Three-phase	2.2	3	2½"	10	P-MC 30/50	780.00
Single-phase	2.2	3	3"	10	P-MCm 30/70+PANEL	1315.00
Three-phase	2.2	3	3"	10	P-MC 30/70	834.00
Three-phase	3	4	2½"	10	P-MC 40/50	968.00
Three-phase	3	4	3"	10	P-MC 40/70	1042.00

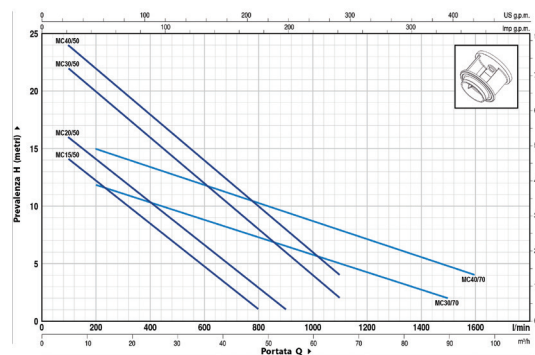

PERFORMANCE CURVES AND DATA 50 Hz n=2900 1/min

Pumped liquid: sewage water drainage
Use: domestic, civil, industrial
Type: submersible
Technique: double channel

PERFORMANCE RANGE

- Flow rate up to 1600 l/min (96 m³/h)
- Head up to 25 m

LIMITS OF USE

- Depth of use below the water level up to 10 m with power cable of adequate length.
- Temperature of the liquid up to +40 °C
- Passage of suspended solid objects:
 - Up to Ø 50 mm for MC 15-20-30-40/50
 - Up to Ø 70 mm for MC 30-40/70
- For continuous service, minimum immersion:
 - Up to 390 mm for MC 15-20-30-40/50
 - Up to 430 mm for MC 30-40/70

Prices valid at the time of printing of the catalogue, and subject to changes by the manufacturer. For up-to-date prices and applied discounts on the products listed on this page, please contact our sales office Tel. 02 89231200 - faet@faet.it - Fax 02 89231230