


CLOSE COUPLED GEAR PUMPS

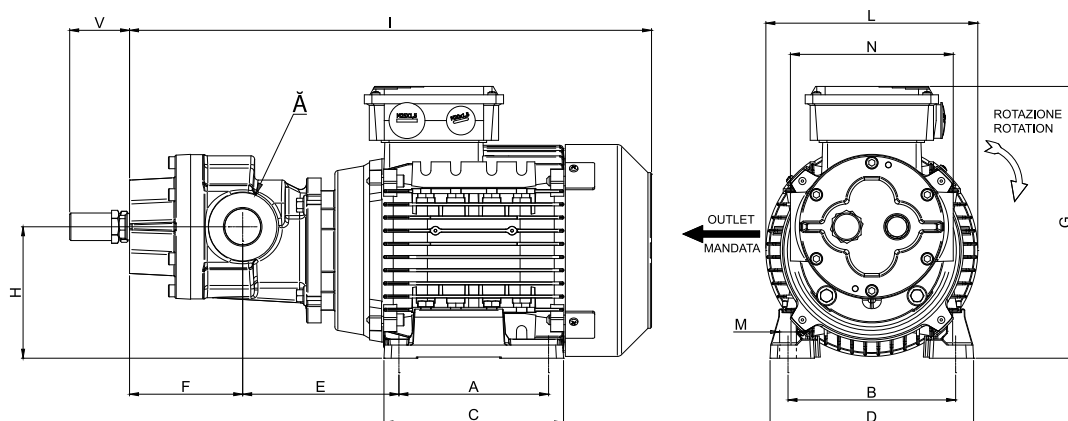

MOTOR AT 1400 REVS/MIN - RPM 1400 - HEAD 10 ATE

KW	HP	F	A	B	C	D	E	F	G	H	I	L	M	N	V	kg	CODE	€
0.26	0.35	1/2"	80	100	100	120	92	62	159	79	306	124	7	113	50	8.1	BMF5	872.41
0.37	0.5	3/4"	90	112	108	135	116	66	181	87	353	138	8	113	50	11.3	BMF10M	955.73
0.55	0.75	3/4"	90	112	108	135	116	76	181	87	363	138	8	113	50	13.4	BMF15M	1006.47
0.75	1	3/4"	100	125	125	154	120	86	208	96	388	156	10	113	50	18.1	BMF25M	1146.03
1.1	1.5	1"	100	140	150	170	130	94	227	110	436	177	10	136	50	24.1	BMF35M	1409.44

Version in cast iron with mechanical seal

Single-phase motors, codes ending in M are monoblock versions

Models of the BMF series indicated can also be provided with single-phase motor, three-phase 6-pole motor, and single-phase 6-pole motor, in cast iron, stainless steel, or bronze versions.

For flow rates different from those indicated in the table, please contact our technical office (range from 2 to 70 l/min).