


# AXIAL FANS FOR PANELS

*With compact motor*

BLOWING FLOW

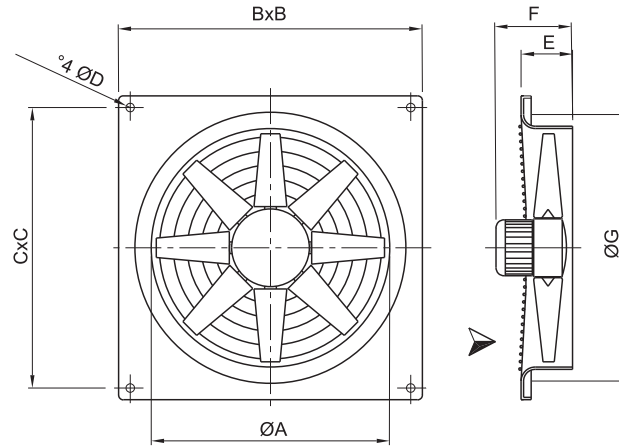

| Model | ØA  | BxB | CxC | ØD | E   | F*  | ØG  | kg* |
|-------|-----|-----|-----|----|-----|-----|-----|-----|
| 31    | 310 | 390 | 350 | 10 | 110 | 170 | 365 | 6   |
| 35    | 360 | 440 | 400 | 10 | 110 | 170 | 410 | 6   |
| 40    | 410 | 500 | 450 | 10 | 110 | 170 | 465 | 7   |
| 45    | 460 | 560 | 510 | 10 | 110 | 175 | 510 | 9   |
| 50    | 510 | 650 | 580 | 10 | 110 | 175 | 570 | 10  |
| 56    | 570 | 700 | 630 | 10 | 130 | 210 | 630 | 16  |
| 63    | 640 | 800 | 730 | 12 | 130 | 210 | 700 | 19  |
| 71    | 710 | 850 | 800 | 12 | 130 | 220 | 770 | 20  |

\* Indicative

## APPLICATIONS

PLATE-S series fans are ideal with consistent air flows and low pressures are required, and can be wall or panel mounted. For example: Ventilation of premises, parking garages, cattle farms, or for cooling electrical equipment, refrigerators, etc.

## TECHNICAL SPECIFICATIONS

PLATE-S standard

- Air conveyed: clean or slightly dusty, non abrasive.
- Temperature of air conveyed: -20°C / +50°C.
- Power supply: Three-phase version (T) 400V-3Ph.  
Single-phase version (M) 230V-1Ph.
- Frequency: 50Hz.
- Air flow from motor to impeller: position A (FMG).