
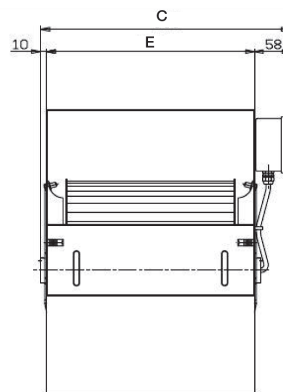


CENTRIFUGAL FANS

DDM/DD SERIES

Double inlet - Three-phase

NICOTRA | Gebhardt

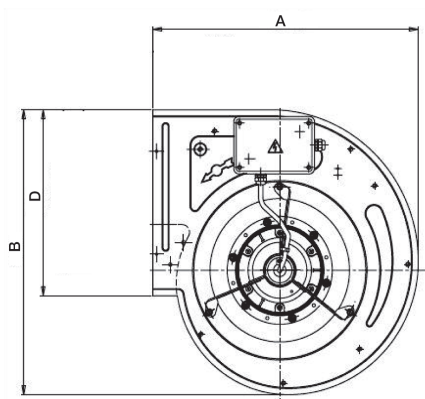

DDM VERSION, THREE-PHASE, 1 SPEED

Model	V	POLES	SPEED.	W	T max	m³/h	ERP	A	B	C	D	E	CODE	€
DDM 7/7	400V	4	1	147	40°C	2300	2015	316	325	356	208	232	0402276	482,00
DDM 9/7	400V	4	1	300	40°C	2930	2015	378,5	387	354	262	232	0402268	511,00
DDM 9/9	400V	4	1	590	40°C	4960	2015	378,5	387	377	262	298	0402269	581,00
DDM 10/8	400V	4	1	500	40°C	4140	2015	424,5	443	360.5	289	265	0402270	691,00
DDM 10/10	400V	6	1	245	40°C	3920	2015	424,5	443	399	289	331	0402271	562,00
DDM 10/10	400V	4	1	750	40°C	5000	2015	424,5	443	399	289	331	0402275	720,00
DDM 12/9	400V	4	1	850	40°C	5250	2015	490,5	521	402.5	341.5	309	0402272	816,00
DDM 12/9	400V	6	1	550	40°C	4420	2015	490,5	521	402.5	341.5	309	0402273	849,00
DDM 12/12	400V	4	1	1500	40°C	8.000	2015	490,5	521	453	341,5	395	0402277	1084,00
DDM 12/12	400V	6	1	550	40°C	6000	2013	490,5	521	453	341.5	395	0402140-ERP	823,00

Basement support not included, can be supplied by request

GENERAL CHARACTERISTICS:

Double inlet centrifugal fan with external rotor motor, recommended where particularly high performance is required, as well as great silence.

They are mainly installed in air treatment units, in evaporation sections of refrigeration circuits, and in air extraction / change systems.

Note: For three-phase versions, we recommend using the Inverter.
For accessories see page 171.