


CENTRIFUGAL FANS AT SERIES - CUBIK VERSION

Double inlet

NICOTRA | Gebhardt

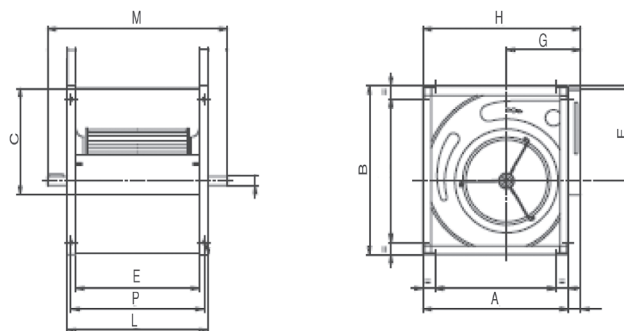

TYPE	KW*	rpm*	Ø SHAFT	A	B	C	E	G	H	L	M	P	CODE	€
7/7	3	2600	20	285	337	208	232	153	321	272	400	254	0402320**	291,00
9/7	3	2500	20	349	399	262	232	185	385	272	400	254	0402321	401,00
9/9	3	2100	20	349	399	262	298	185	385	338	460	320	0402322	407,00
10/8	3	2500	20	395	455	289	265	203	431	305	425	287	0402323	359,00
10/10	4	2000	20	395	455	289	331	203	431	371	490	353	0402324	363,00
12/9	5.5	2000	25	461	533	341	309	230	497	365	495	339	0402325	472,00
12/12	5.5	1500	25	461	533	341	395	230	497	451	585	425	0402326	493,00
15/11	5.5	2000	25	539	621	404	373	264	575	429	585	403	0402327	520,00
15/15	5.5	1200	25	539	621	404	471	264	575	527	685	501	0402328	534,00
18/13	7.5	1200	25	654	751	478	430	314	690	506	666	470	0402329	587,00
18/18	7.5	1100	25	654	751	478	557	314	690	633	790	597	0402330	621,00

*Maximum installable values for the coupling motor (not included).

**SC version

Note: Twin version by request

DESCRIPTION:

Double inlet centrifugal fans with belt drive and support chassis.

Bearings in rubber vibration supports

Made of galvanised plating

APPLICATIONS:

- Ventilating sections of air treatment units
- Cooker hoods
- Ventilating boxes
- Evaporating sections of refrigeration units