


CENTRIFUGAL FANS RADIAL 2RRE - 4RRE


Backward curved blades - 2 and 4 pole




2RRE 133

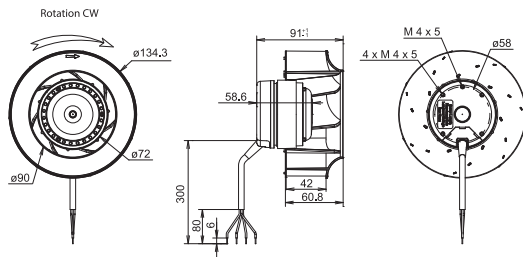


2RRE 180

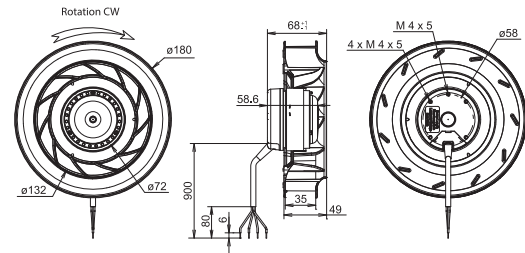


2RRE 225

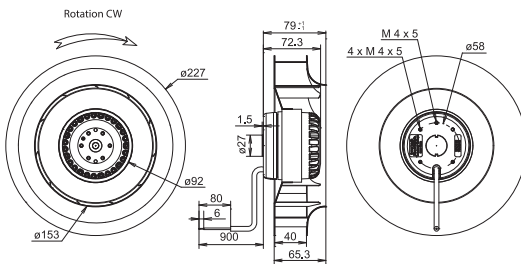


4RRE 280x80R

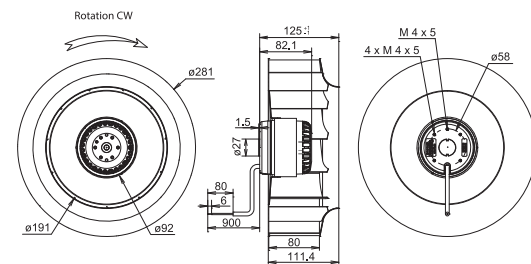

4RRE 280x90R

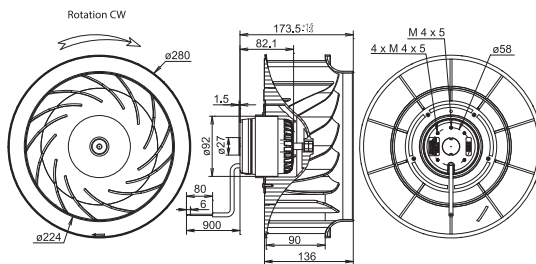

4RRE 315

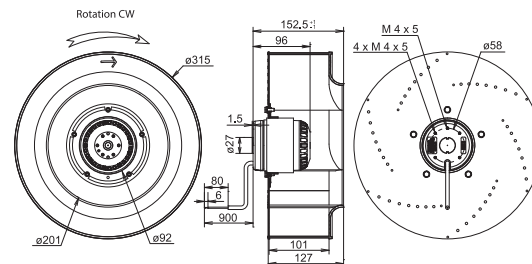

MODEL	POLES	SIZE	V	HZ	W	m³/h	dB	ERP	CODE	€
2RREA3 133X42R-D04A4	2	Ø135X61	230	50/60	23/28	315/365	53.0/56.0	EXEMPT	0402241	123,00
2RREA3 180X35R-D04A6	2	Ø180X49	230	50/60	39/48	490/540	58.0/60.0	EXEMPT	0402245	120,00
4RRE35 280X80R-Z1903	4	Ø280X80	230	50/60	81/94	1,390/1,535	61.0/65.0	EXEMPT	0402237FE	280,00
4RRE35 280X90R-Z1904	4	Ø280X90	230	50/60	95/101	1,450/1,510	53.0/53.0	EXEMPT	0402278	335,00
4RRE45 315X101R-L38A3	4	Ø315X128	230	50/60	100/129	1,770/1,900	59.0/61.0	EXEMPT	0402235FE	335,00

GENERAL SPECIFICATIONS

- Motor in die cast aluminium alloy, painted black.
- Fibreglass reinforced PA 6/6 impeller
- Electrical connection by wire

- Starter capacitor supplied separately
- Class F with trip switch protection for motor
- Support: ball bearings

MECHANICAL SEALS

PUMPS

FANS

MOTORS

INSULATION

EQUIPMENT

MOTOR SPARES

TOOL SPARES

SWITCHES