
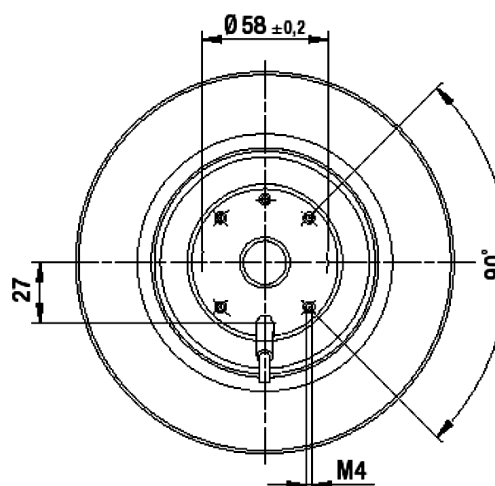


# RADIAL FANS

## G2E SERIES

*Backward curved blades - 2 pole*

**ebm**papst

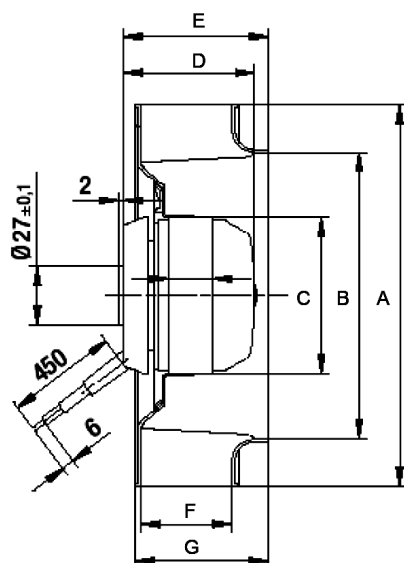

| Model        | A   | B   | C  | D    | E    | F    | G    | V   | HZ    | m³/h | W   | Amp  | µF  | CODE        | €      |
|--------------|-----|-----|----|------|------|------|------|-----|-------|------|-----|------|-----|-------------|--------|
| R2S175AB5601 | 175 | 131 | 72 | 61.5 | 69   | 42   | 62   | 230 | 50/60 | 440  | 53  | 0.33 | —   | 0402420     | 172,00 |
| R2E190RA2605 | 190 | 131 | 92 | 62.7 | 68.5 | 44.6 | 62.8 | 230 | 50/60 | 570  | 58  | 0.26 | 2   | 0402421     | 172,00 |
| R2E220AA4005 | 220 | 159 | 92 | 63   | 71   | 44   | 63   | 230 | 50/60 | 860  | 85  | 0.38 | 1.5 | 0402422     | 150,00 |
| R2E220AB0605 | 220 | 159 | 92 | 73   | 71   | 44   | 63   | 230 | 50/60 | 885  | 85  | 0.38 | 2.5 | 0402423     | 230,00 |
| R2E250RC0801 | 250 | 172 | 92 | 97.5 | 99   | 56   | 84.3 | 230 | 50/60 | 1450 | 155 | 0.70 | 5   | 0402425-ERP | 335,00 |

### DESCRIPTION

Single-phase, 2 pole, single inlet fans with permanent capacitor and shielded poles. Air flow rates up to 1450 m³/h, insulation class "B". This fan is made of fibreglass reinforced plastic.

By request, a 110V 60 Hz version is available,