


WALL-MOUNTED EXTRACTORS

CV/KV 100 A/C


ÖSTBERG
HEALTHY INDOOR CLIMATE
WITH ENERGY EFFICIENT VENTILATION

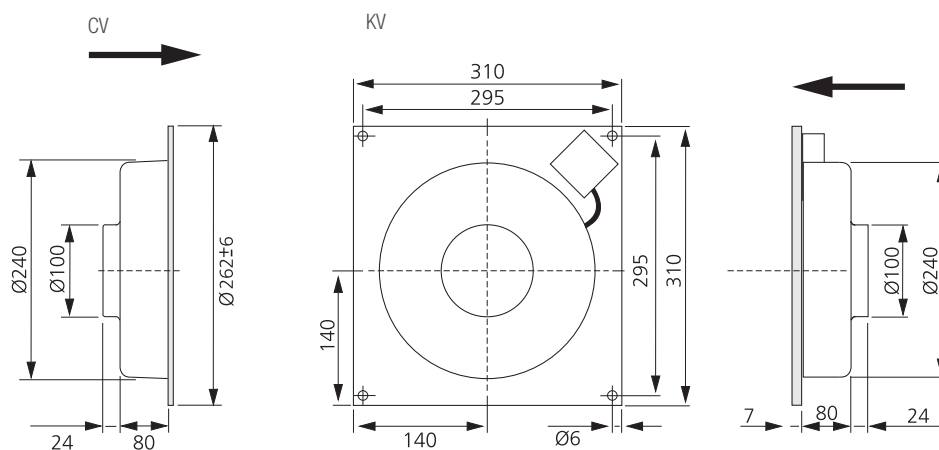

TECHNICAL DATA

MOD.	V/Hz	A	W	rpm	kg	µF	INSUL. CLASS motor	PROTEC. motor	CODE	€
CV 100A	230/50-60	0,18	41	1730	2,3	3	F	IP 44	0411917	157,50
KVFU 100C	230/50-60	0,27	62	2530	2,3	2	F	IP 44	0411918	175,00


PRESSURE/FLOW

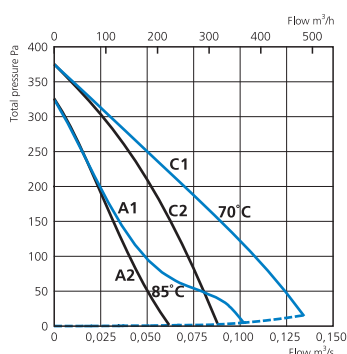

ACOUSTIC DATA

CV/KV 100 A, 40 l/s 125 Pa	L _{PA}	L _{WA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
AMBIENT	36	43	35	21	33	35	39	37	37	31
INTAKE		66	45	56	64	60	58	52	45	38
CV/KV 100 C, 60 l/s 170 Pa	L _{PA}	L _{WA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
AMBIENT	42	49	34	23	40	40	44	42	44	38
INTAKE		70	50	61	66	65	65	59	52	46

POWER/FLOW



DESCRIPTION:

Wall-mounted fans for circular section tubes, with or without square plate.
T MAX air conveyed in degrees Centigrade = 70 .

MECHANICAL SEALS

PUMPS

FANS

MOTORS

INSULATION

EQUIPMENT

MOTOR SPARES

TOOL SPARES

SWITCHES