


TACHYMETER

CT 110

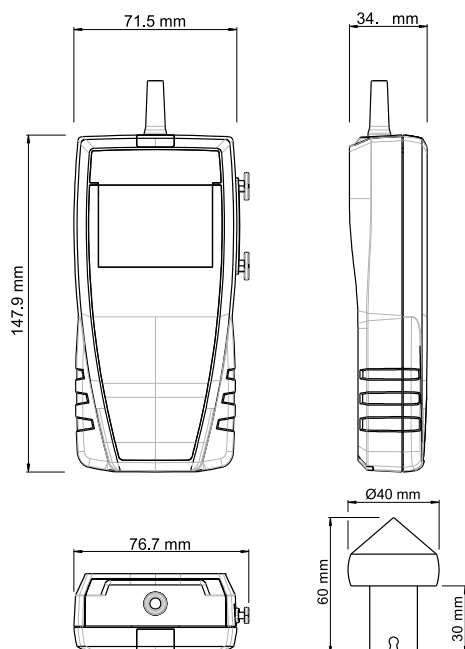

DESCRIPTION

TACHYMETER KIMO CT 110S

REFLECTIVE STRAP 1 M LONG

CODE

S24718**S10378**

€

650,00**50,00**

PARAMETERS

Measuring elements

Optical tachymeter: optical measurement (max measuring distance 40 cm)
 Contact tachymeter: ETC adapter for optical tachymeter sensor

Display

4 lines, LCD technology Dimensions 50 x 36 mm
 2 lines of 5 digits with 7 segments (value) - 2 lines of 5 digits with 16 segments (units)

	Unit of measurement	Measuring range	PRECISION	RESOLUTION
Optical tachymeter	rpm	from 0 to 60 000 rpm	from 60 to 10 000 rpm : $\pm 0,3\%$ of measurement value ± 1 rpm measurement value ± 1 rpm	1 rpm
Contact tachymeter	rpm, m/min, ft/min, in/min, m/s	from 0 to 20 000 rpm	from 30 to 20 000 rpm: $\pm 1\%$ of the value of measurement ± 1 rpm	1 rpm

CHARACTERISTICS

- Spiral cable, length 0,45m, extension : 2,4 m).
- ABS case, IP54 protection
- 5 key keypad
- Conformity to Directives: CEM 2004/108/CE and NF EN 61010-1
- Power supply 4 batteries AAA LR03 1.5 V
- Ambient as neutral
- Working temperature 0°C to +50 °C
- Storage temperature -20 to +80 °C
- Automatic switch-off settable from 0 to 120 min
- Weight 190 g

FUNCTIONS

- Contact / Optical selection

- Tachymetric units selection
- Hold function
- Displaying of minimum and maximum values
- Settable automatic switch-off
- Backlit

SUPPLIED WITH

- Optical tachymeter sensor $\varnothing 17$ mm, length 195 mm
- Contact end
- 50 cm with reflective strap
- Calibration certificate
- Carrying case (ref. ST 110)

MECHANICAL SEALS

PUMPS

FANS

MOTORS

INSULATION

EQUIPMENT

MOTOR SPARES

TOOL SPARES

SWITCHES