


BLOWING FORCE-VENTILATION KIT

Three-phase

Terminal board
Voltage
Hz.

IP55
400V.
50/60

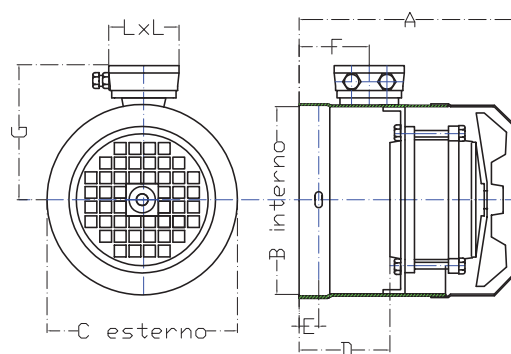

SIZE	TYPE	RPM	WATT	AMP	M3/H	A	B	C	D	E	F	G	CODE	€
63	self-braking	2900	120	0,14	250	218	121	123	106	6	80	115	K063TCM55A	270,24
	normal					172			63		70		K063TCM55N	270,20
71	self-braking	2900	120	0,14	250	227	136	138	110	6	110	122	K071TCM55A	275,52
	normal					185			68		65		K071TCM55N	275,09
80	self-braking	2900	120	0,2	300	238	155	157	108	6	85	130	K080TCM55A	286,70
	normal					192			64		70		K080TCM55N	284,89
90	self-braking	2900	120	0,2	350	242	174	176	110	6	75	139	K090TCM55A	302,91
	normal					199			67		70		K090TCM55N	300,35
100	self-braking	2900	120	0,2	400	250	191	193	112	6	90	148	K100TCM55A	302,96
	normal					205			67		70		K100TCM55N	302,86
112	self-braking	2900	120	0,21	450	273	218	220	131	8	85	160	K112TCM55A	308,53
	normal					218			77		80		K112TCM55N	307,58
132	self-braking	2900	120	0,23	550	299	256	258	149	8	90	182	K132TCM55A	319,93
	normal					252			106		80		K132TCM55N	319,63

MECHANICAL SEALS

PUMPS

FANS

MOTORS

INSULATION

EQUIPMENT

MOTOR SPARES

TOOL SPARES

SWITCHES