

PRESSPAN IN SHEETS

OPERATING TEMP.

CLASS	A	105°
CLASS	B	130°
CLASS	F	155°
CLASS	H	180°



THICKNESS mm	BREAKDOWN VOLTAGE kv/mm	WEIGHT gr/m ² +/- 12%	DIMENSIONS mm x mm	AVERAGE WEIGHT PER SHEET	CODE	€/kg
1.00	40	1100	1100 x 1100	1.33	0801510	10.91
1.50	40	1650	1100 x 1100	1.99	0801515	10.91
2.00	35	2200	1100 x 1100	2.66	0801520	10.91
2.50	35	2750	1100 x 1100	3.33	0801525	11.45
3.00	35	3300	1100 x 1100	3.99	0801530	11.95
3.50	35	3850	1100 x 1100	4.65	0801535	13.25
4.00	30	4400	1100 x 1100	5.33	0801540	13.25
5.00	30	5500	1100 x 1100	6.66	0801550	14.00

N.B. THE 1100X2200 MM FORMAT IS AVAILABLE AND IN STOCK UP TO A THICKNESS OF 3 MM.


For sales conditions, please contact our sales office Tel. 02 89231200 - avolgimenti@faet.it - Fax 02 89231230

UNSATURATED DM FAETISO F6

OBJS2.E317429 DV-155J TAB IX (JOHN c. Dolph's)

OPERATING TEMP.

CLASS	A	105°
CLASS	B	130°
CLASS	F	155°
CLASS	H	180°

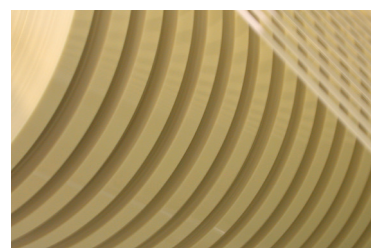

THICKNESS mm	BREAKDOWN VOLTAGE kv/mm	THICKNESS FILM μ m	WEIGHT gr/m ² +/- 12%	WIDTH mm	kg	CODE	€/kg
0.18	12	125	221	1000	20	0802618-20	19.00
0.24	15	190	312	1000	20	0802624G-20	17.50
0.30	18	250	396	1000	20	0802630G-20	17.40