


# POLYESTER FILM FOR ELECTRICAL PURPOSES

FAET<sup>us</sup> QMFZ2.E110983 - QMFZ8.E110983

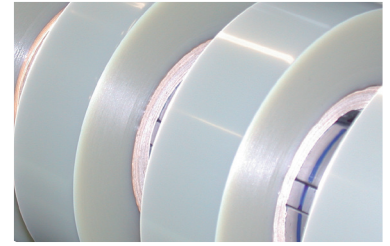

## OPERATING TEMP.

CLASS	A	105°
<b>CLASS</b>	<b>B</b>	<b>130°</b>
CLASS	F	155°
CLASS	H	180°

THICKNESS mm	BREAKDOWN VOLTAGE kv/mm	WEIGHT gr/m <sup>2</sup> +/- 12%	WIDTH mm	kg	CODE	€/kg
0.125	15.6	172.4	1000	20	<b>0800212-20</b>	<b>10.92</b>
0.190	20	263.1	1000	20	<b>0800219-20</b>	<b>10.92</b>
0.250	22.5	357.1	1000	20	<b>0800225-20</b>	<b>10.92</b>
0.300	24.5	420	1000	20	<b>0800230-20</b>	<b>11.69</b>
0.350	27	500	1000	20	<b>0800235-20</b>	<b>12.45</b>

Possibility of providing rolls with H500 with a minimum package of 10 Kg.

## PROPERTIES

Operating temperature: from -70°C to 165°C

Melting point: 250-165°C

Shrinkage at 150 °C: from 2%-3%

Dielectric strength at 25 °C: 280 Kv/mm.

Dielectric strength at 150°C: 200 Kv/mm.

Colour: Milk white

N.B.: The weights of the packs are indicative with a tolerance of +/- 10 %.

The widths may be subject to maximum variations of +/- 7,5 %.

For different cuts, please contact our sales office.

Tel. 02 89231200 - awolgimenti@faet.it - Fax 02 89231230