

POLYESTER FILM

MYLAR® A

FAET ^{US} QMFZ2.E93687 - QMFZ8.E93687


OPERATING TEMP.

CLASS A 105°

CLASS B 130°

CLASS F 155°

CLASS H 180°

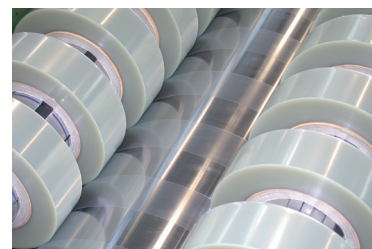

THICKNESS mm	BREAKDOWN VOLTAGE kv/mm	WEIGHT gr/m ² +/- 12%	HEIGHT mm	 kg	CODE	€/kg
0.125	15.6	172.4	1000	20	0800512-20	14.05
0.190	20	263.1	1000	20	0800519-20	14.05
0.250	22.5	357.1	1000	20	0800525-20	14.90
0.300	24.5	420	1000	20	0800530-20	15.80
0.350	27	500	1000	20	0800535-20	19.35

Possibility of providing rolls with H500 with a minimum package of 10 Kg.

Polymer material of terephthalic acid and ethylene glycol, in the form of a transparent flexible film.

Mylar® is a registered trademark of Dupont Teijin Films
N.B.: For different cuts, please contact our sales office.
Tel. 02 89231200 - avvolgimenti@faet.it - Fax 02 89231230

MECHANICAL SEALS

PUMPS

EXTRACTOR FANS

MOTORS

INSULATION

EQUIPMENT

MOTOR PARTS

TOOL PARTS

SWITCHES