


NOMEX® - POLYESTER - NOMEX® FAETISO F1

OBJS2.E317429 DV-155J TAB IX (JOHN c. Dolph's)
OBJS2.E221010 FAET180 IS

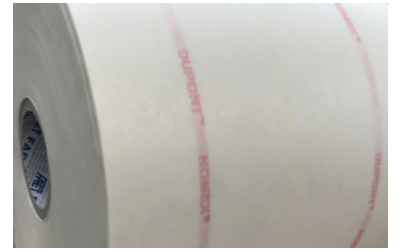

OPERATING TEMP.

| | | |
|--------------|----------|-------------|
| CLASS | A | 105° |
| CLASS | B | 130° |
| CLASS | F | 155° |
| CLASS | H | 180° |

| THICKNESS mm | BREAKDOWN VOLTAGE kv/mm | THICKNESS FILM μ m | WEIGHT gr/m ² +/- 12% | HEIGHT mm | kg | CODE | €/kg |
|--------------|-------------------------|------------------------|----------------------------------|-----------|----|------------------------|--------------|
| 0.19 | 11 | 75 | 202 | 457 | 10 | 0801819T-457-10 | 70.45 |
| | | | | 914 | 20 | 0801819-20 | 64.30 |
| 0.22 | 12 | 100 | 235 | 457 | 10 | 0801822T-457-10 | 62.30 |
| | | | | 914 | 20 | 0801822-20 | 56.60 |
| 0.24 | 14 | 125 | 270 | 457 | 10 | 0801824T-457-10 | 56.60 |
| | | | | 914 | 20 | 0801824-20 | 51.50 |
| 0.31 | 19 | 190 | 360 | 457 | 10 | 0801831T-457-10 | 45.85 |
| | | | | 914 | 20 | 0801831-20 | 41.70 |
| 0.37 | 23 | 250 | 440 | 457 | 10 | 0801837T-457-10 | 40.35 |
| | | | | 914 | 20 | 0801837-20 | 36.70 |
| 0.41 | 25 | 300 | 520 | 457 | 10 | 0801841T-457-10 | 34.70 |
| | | | | 914 | 20 | 0801841-20 | 31.55 |
| 0.47 | 28 | 300 | 520 | 457 | 10 | 0801847T-457-10 | 34.70 |
| | | | | 914 | 20 | 0801847-20 | 31.55 |

DESCRIPTION:

Flexible insulating paper obtained by hot bonding a film of polyester with two layers of 50 μ Nomex® firmly anchored to the two faces of the film using special resins.

Nomex® is a registered trademark of Dupont de Nemours
N.B. The weights of the packs are indicative with a tolerance of +/- 10 %
The widths may be subject to maximum variations of +/- 7,5 %.
For different cuts, please contact our sales office.
Tel. 02 89231200 - avolgimenti@faet.it - Fax 02 89231230