

RB 27-G60

SILICON/SILICON/FKM


QQV

LIQUIBLOK



Rotation: bi directional
 Stationary ring: with cup
 Max pressure: 12 bar
 Temperature: -20° max +180°
 for water max +120°

Use: oils, acids, hydrocarbons, liquids in the presence of abrasives

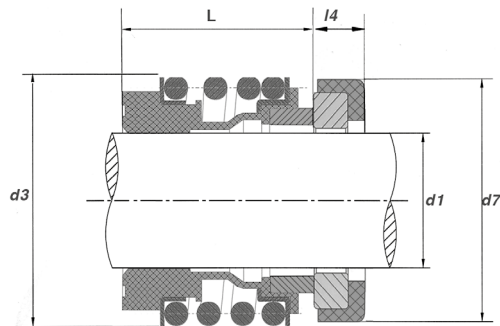

Dimensions mm

| SHAFT d1 | ROTATING PART | | STATIONARY RING | | COMPLETE MECHANICAL SEAL | |
|--------------------|---------------|----------|-----------------|-----------|--------------------------|---------------|
| | d3 | L | d7 | l4 | CODE | € |
| 12 | 25 | 25.9 | 23 | 6.6 | 0327012 | 67.63 |
| 14 | 28.5 | 8.4 | 25 | 6.6 | 0327014 | 84.80 |
| 16 | 29 | 28.4 | 27 | 6.6 | 0327016 | 87.98 |
| 18 | 32 | 30 | 33 | 7.5 | 0327018 | 90.95 |
| 20 | 37 | 30 | 35 | 7.5 | 0327020 | 92.33 |
| 22 | 37 | 30 | 37 | 7.5 | 0327022 | 117.45 |
| 24 | 42 | 32.5 | 39 | 7.5 | 0327024 | 125.08 |
| 25 | 42 | 32.5 | 40 | 7.5 | 0327025 | 132.50 |
| 28 | 49 | 35 | 43 | 7.5 | 0327028 | 155.29 |
| 30 | 49 | 35 | 45 | 7.5 | 0327030 | 163.46 |
| 32 | 52 | 35 | 48 | 7.5 | 0327032 | 165.89 |
| 33 | 53.5 | 35 | 48 | 7.5 | 0327033 | 170.88 |
| 35 | 56 | 35 | 50 | 7.5 | 0327035 | 188.68 |
| 38 | 58 | 36 | 56 | 9.0 | 0327038 | 218.15 |
| 40 | 65 | 36 | 58 | 9.0 | 0327040 | 253.24 |

Mechanical seal in alternative to mod. MG12-G60

On request, the stationary rings on pages 49-50-51 can be supplied.