

CROCODILE
CLIPS

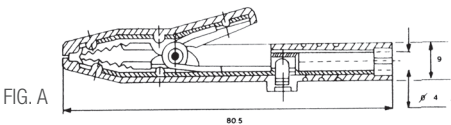


FIG. A




FIG. B

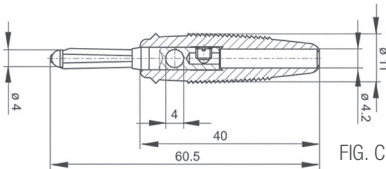


FIG. C




FIG. A




FIG. B



FIG. C

FIGURE	pc	CODE	€/pc
A	6 (3 red - 3 black)	3307800	6.93
B	10 (5 red - 5 black)	3307802	2.95
C	10 (5 red - 5 black)	3307804	2.90

C: Pins for crocodile clips

Colours: red and black

The price is per piece and not per pack.

METALLIC FILLER
SUPERIOR METAL

LOCTITE



g	CODE	€
454	3003805H	210.35

This is a two component metallic stucco for reconstructing bearing seatings, worn shafts, motor casings, and pump bodies, and for balancing large rotors. Once it has hardened it can be machined again using machine tools to obtain the original tolerances and roughness, and is able to withstand a temperature of 120 °C.

Mixing ration: volume 4:1 (weight 7.25:1)
N.B.: Applied with a thickness of 1 mm on the rotor shaft, it is able to insulate it from "shaft currents" in electric motors.