PRECUT SHIMS
PERMABLOC®

In stainless steel, reusable
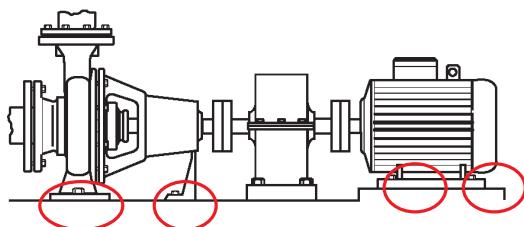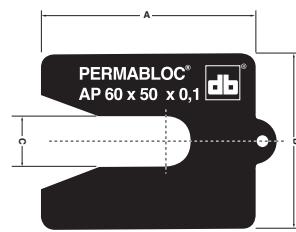
db PRÜFTECHNIK

PERMABLOC®
AP 60 x 50 x 0,1

TYPE	DIMENSIONS mm			THICKNESS	pc	CODE	€/pc
	A	B	C	mm			
A	60	50	15(M12)	0.025	20	**0710050**	**4.10**
	60	50	15	0.05	20	**0710051**	**4.10**
	60	50	15	0.1	20	**0710052**	**4.39**
	60	50	15	0.2	20	**0710053**	**4.39**
	60	50	15	0.4	20	**0710054**	**4.39**
	60	50	15	0.7	20	**0710055**	**4.39**
	60	50	15	1.0	20	**0710056**	**5.02**
	60	50	15	2.0	10	**0710057**	**6.90**
B	80	70	22(M18)	0.025	20	**0710060**	**4.73**
	80	70	22	0.05	20	**0710061**	**4.73**
	80	70	22	0.1	20	**0710062**	**6.61**
	80	70	22	0.2	20	**0710063**	**6.61**
	80	70	22	0.4	20	**0710064**	**6.61**
	80	70	22	0.7	20	**0710065**	**6.61**
	80	70	22	1.0	20	**0710066**	**6.90**
	80	70	22	2.0	10	**0710067**	**12.54**

TYPE	DIMENSIONS mm			THICKNESS	pc	CODE	€/pc
	A	B	C	mm			
C	100	80	32(M27)	0.025	20	**0710070**	**6.61**
	100	80	32	0.05	20	**0710071**	**6.61**
	100	80	32	0.1	20	**0710072**	**8.15**
	100	80	32	0.2	20	**0710073**	**8.15**
	100	80	32	0.4	20	**0710074**	**8.15**
	100	80	32	0.7	20	**0710075**	**8.15**
	100	80	32	1.0	20	**0710076**	**9.12**
	100	80	32	2.0	10	**0710077**	**16.02**
D	130	105	44(M36)	0.025	20	**0710080**	**8.78**
	130	105	44	0.05	20	**0710081**	**8.78**
	130	105	44	0.1	20	**0710082**	**12.88**
	130	105	44	0.2	20	**0710083**	**12.88**
	130	105	44	0.4	20	**0710084**	**12.88**
	130	105	44	0.7	20	**0710085**	**12.88**
	130	105	44	1.0	20	**0710086**	**13.79**
	130	105	44	2.0	10	**0710087**	**24.80**

DESCRIPTION	pc	CODE	€/pc
CASE OF SHIMS A/B/C/D	640	**0710090-V**	
CASE OF SHIMS A/B	320	**0710091-V**	**On request**
CASE OF SHIMS C/D	320	**0710092-V**	

- They are available in 4 different sizes, each with 8 different thicknesses, so as to provide the right correction in alignment for each machine.
- They are made of excellent quality stainless steel, to prevent corrosion when they are exposed to acids and alkalis.
- Markings concerning dimensions and thickness allow immediate identification.

- They are perfectly flat to ensure stability and consistent support for the machine over the entire support surface area.
- They are entirely deburred, with rounded corners, to reduce the risk of cuts during alignment operations.
- The have a perforated tab to facilitate positioning and removal
- They are reusable.