

RB 1

GRAPHITE/SILICON/EPDM



BQE

Temperature: -40° max +150°

Use: alkalis, acetate, clean liquid vapour (no hydrocarbons)

LIQUIBLOK

Rotation: bi directional
Stationary ring: with cup
Max pressure: 6 bar

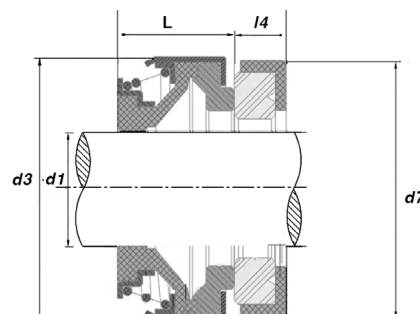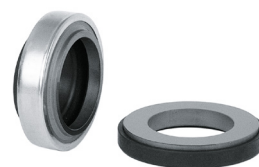

SILICON/SILICON/FKM

QQV

Temperature: -20° max +180°
for water max +120°

Use: acids, petrochemical products, liquids with the presence of abrasives

Dimensions mm						GRAPHITE/SILICON/EPDM	SILICON/SILICON/FKM		
SHAFT	ROTATING PART		STATIONARY RING			COMPLETE MECHANICAL SEAL		COMPLETE MECHANICAL SEAL	
d1	d3	L	d7	l4		CODE	€	CODE	€
12	24	13	26	8	12	0340012	3.62	0304012	25.72
13	24	11.5	26	8	12	0340013	3.71	--	--
13	24	13	28	8	12	--	--	0304013L	25.72
13	28	13	28	8	12	0340013L	3.71	--	--
14	28	13	28.5	8	12	0340014	4.90	0304014	31.70
14	32	13	29.5	8	12	0340014L	6.24	0304014L	40.95
15	32	13	29.5	8	12	0340015	5.05	0304015	34.68
16	32	13	29.5	8	12	0340016	5.72	0304016	39.47
16	39	13	38	8	12	0340016L	8.58	0304016L	43.05
17	39	13	42	8	12	0340017	9.35	0304017	47.83
18	39	13	42	8	12	0340018	10.00	0304018	48.44
19	39	13	42	8	12	0340019	10.27	0304019	50.23
20	39	13	42	8	12	0340020	10.79	0304020	53.81
20	42	13	45	10	12	0340020L	12.86	0304020L	55.60
22	42	13	45	10	6	0340022	14.29	0304022	63.37
23	47	13.5	50	10	6	0340023	15.07	0304023	75.93
24	47	13.5	50	10	6	0340024	15.71	0304024	77.73
25	42	13.5	50	10	6	0340025	18.70	0304025	80.11
25	47	13.5	50	10	6	0340025L	18.58	0304025L	81.90
26	47	13.5	50	10	6	0340026	18.58	--	--
27	47	13.5	50	10	6	0340027	20.01	--	--
28	54	15	57	10	6	0340028	24.30	0304028	92.08
30	54	15	57	10	6	0340030	25.72	0304030	105.22
32	54	15	57	10	6	0340032	26.49	0304032	111.80
35	60	16	63	10	6	0340035	30.00	0304035	127.35
38	65	18	68	12	6	0340038	35.72	0304038	135.72
40	65	18	68	12	6	0340040	37.15	0304040	150.65
45	70	18	73	12	6	0340045	38.74	0304045	162.62

MECHANICAL SEALS

PUMPS

EXTRACTOR FANS

MOTORS

INSULATION

EQUIPMENT

MOTOR PARTS

TOOL PARTS

SWITCHES