
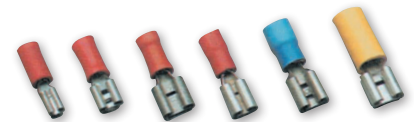


TERMINAL PRE-INSULATED QUICK COUPLING

0,25 - 6 mm² - Tinned copper, with anti-vibration
copper bushing

CE


FEMALE, INSULATED



SELF-EXTINGUISHING PVC TUBE

Colour	Section mm ²	AWG	Ø A per screws	B	C	L	pcs	CODE	€/pc
•	0,25-1,5	22-16	2,8X0,5	6	1,8	18	100	3307507	0,17
•	0,25-1,5	22-16	2,8X0,8	6	1,8	18	100	3307508	0,17
•	0,25-1,5	22-16	4,8X0,5	6	1,8	19.5	100	3307509	0,17
•	0,25-1,5	22÷16	6,3X0,8	7.8	1,8	19.5	100	3307510	0,17
•	1,5-2,5	16-14	4,8X0,5	6	2,3	20	100	3307511	0,17
•	1,5-2,5	16-14	6,3X0,8	7.8	2,3	20.5	100	3307512	0,17
•	2,5-6	12-10	6,3X0,8	7.8	3,4	25	100	3307514	0,25


FULLY INSULATED
FEMALE



SELF-EXTINGUISHING PVC TUBE

Colour	Section mm ²	AWG	Ø A per screws	B	C	L	pcs	CODE	€/pc
•	0,25-1,5	22÷16	6,3X0,8	7.8	1,8	20.5	100	3307522	0,21
•	1,5-2,5	16-14	6,3X0,8	7.8	2,3	22	100	3307524	0,24
•	2,5-6	12-10	6,3X0,8	7.8	3,4	26	100	3307526	0,28

CONNECTORS WITH HEAD MADE
FROM COPPER PIPE



Colour	Section mm ²	AWG	B	C	L	pcs	CODE	€/pc
•	0,25-1,5	22-16	5	1,8	26	100	3307652	0,15
•	1,5-2,5	16-14	5,5	2,4	26	100	3307654	0,17
•	2,5-6	12-10	6	3,6	27	100	3307658	0,25