



T-MEC ELECTRIC BRAKES IN AC GROOVED SERIES

230/400 Volts

C **UL** **US** UL APPROVED FILE E210965

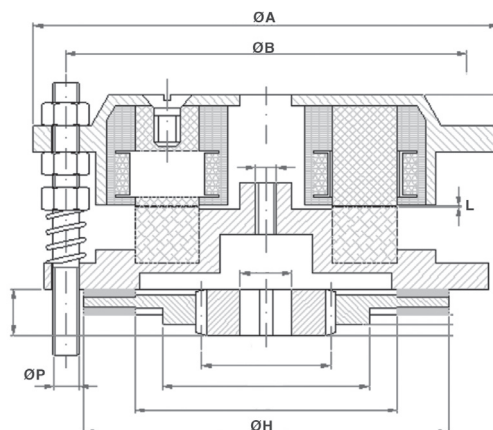

TERMINAL BOARD CONNECTION

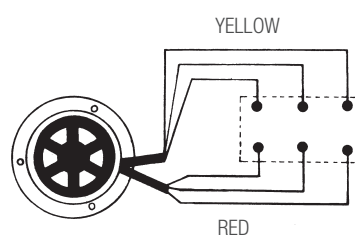

Motor Size	A	B	H	L	P	V.A.	KPM	N° Discs	CODE	€
MEC 63	122	110	102	0.2	6 MA	45	0.9	1	0901003	152,50
T70	130	115	102	0.2	6 MA	45	0.9	1	0901007	132,00
MEC 71	134	121	113	0.2	6 MA	50	1.2	1	0901011	162,80
T80	145	125	113	0.2	6 MA	50	1.2	1	0901015	147,80
MEC 80	155	138	128	0.3	8 MA	65	2.5	1	0901019	177,90
T90	170	145	128	0.3	8 MA	65	2.5	1	0901023	165,00
MEC 90	173	155	143	0.3	8 MA	90	3.5	1	0901027	197,50
T100	180	160	143	0.3	8 MA	90	3.5	1	0901031	180,90
MEC 100	191	170	158	0.3	10 MA	105	5	1	0901051	204,50
T110	200	170	158	0.3	10 MA	105	5	1	0901035	200,70
MEC 112	218	200	182	0.4	10 MA	150	8	1	0901053	231,00
T120	230	200	182	0.4	12 MA	150	8	1	0901039	236,30
T 110 D	200	170	158	0.4	10 MA	105	10	2	0901037*	318,20
T 120 D	230	200	182	0.5	12 MA	150	16	2	0901041	338,00
MEC 132D-T 140D	240	210	193	0.6	12 MA	180	22	2	0901045	457,00

Packages: Single items

* Stocks running low

V.A. = Volt/Ampere

KPM = Braking torque kg/m

L = Max size of the air gap allowed, which is four times the "L" dimension.