


ELECTRIC BRAKES "K" SERIES IN D.C.

200 V

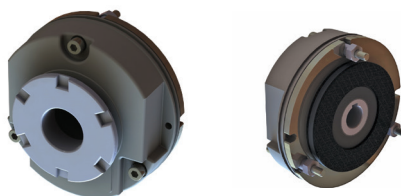

TYPE	A	B	C	D	E	F	G	H	I	L	M	N	O	P	Power W	C.F.*	CODE	€
K01	84	72	61	4 MA	35	10 12	20	50	1.5	18	9	4	0.2	38	15	4.5	0901480* 0901519*	97,02
K02	104	90	77	5 MA	44	11 15	26	61	1.5	20	9	4	0.2	42	20	8	0901481 0901482	110,88
K03	114	103	88	5 MA	62	11 15	26	61	1.5	20	9	4	0.2	47	25	18	0901483 0901484	127,05
K04	124	112	98	6 MA	69	15 25	42	79	1.5	20	9	5.5	0.2	48	30	16	0901504 0901489	140,91
K05	148	132	119	6 MA	79	24 28	60	104	1.5	25	10	8	0.3	63	45	35	0901506 0901491	198,66
K06	159	145	128	8 MA	80	25 34	60	104	1.5	30	10	8	0.3	68.5	50	60	0901492 0901494	237,93
K07	189	170	151	8 MA	90	25 34	60	104	1.5	30	10	8	0.3	77	55	80	0901495 0901511	339,57
K07/D	189	170	151	8 MA	90	35 34	60	104	1.5	60	10	8	0.3	101	55	160	0901520 0901521	420,42
K08	218	196	176	10 MA	103	24 34	60	104	1.5	40	10	8	0.3	77	60	150	0901522 0901514	457,38
K08/D	218	196	176	10 MA	103	34 48	60	104	1.5	60	10	8	0.4	101	60	300	0901518 0901523	568,26 770,38
K09	248	230	204	10 MA	114	44 45 48	60	104	1.5	40	10	8	0.4	79	65	200	0901524 0901525 0901526	716,10 820,05
K09/D	248	230	204	10 MA	114	44 45 48	60	104	1.5	40	10	8	0.4	103	65	400	0901527 0901528 0901529	860,47 1136,50
Recommended rectifier																	0901637	25,41

*C.F. = Static braking torque (N.m)
Packages: Single items * Stocks running low