



HALF WAVE RECTIFIERS TYPE S1R - S2R - S4R


With automatic rapid disconnection

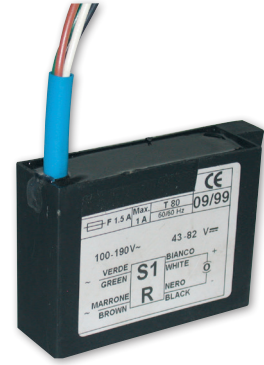

Connection diagram for normal operation

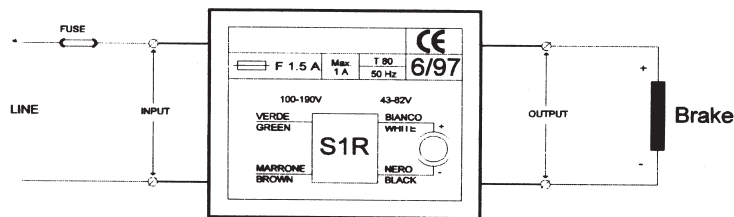

Output wave shape



TECHNICAL DATA:

TYPE	INPUT V ~	OUTPUT MAINTAINED V-	CAPACITY MAX A.	CABLE COLOUR		CODE	€
				INPUT	OUTPUT		
S 1 R	100-190	43-82	1	green-brown	(+) white	0901633	36,96
S 2 R	190-250	85-112	1	green-red	(-) black	0901634	36,96
S 4 R	250-440	112-197	1	green-yellow		0901635	48,51

Packages: Single items

GENERAL FEATURES

These are half wave rectifiers protected by varistors at the input and outlet, recommended for power supplies to DC brakes, where quick deactivation is required, that is, thanks to a static switch that opens the DC output circuit as soon as the alternate power supply fails. An external contact is therefore not necessary.

These models conform to Community Directives 89/392 CEE, 73/23 CEE, 89/336 CEE.

COUNTER INDICATIONS: do not install in areas with a temperature exceeding +80°C or below -15°C

DIMENSIONS mm (l x h x s)= 64 x 48 x 21