

MECHANICAL SEALS FOR ABS® PUMPS


SILICON/SILICON/FKM

LIQUIBLOK

QQV



Rotation: bi directional
 Stationary ring: with cup
 Max pressure: 12 bar
 Temperature: -20° max +180° for water max +120°
 Use: oils, acids, hydrocarbons, liquids in the presence of abrasives

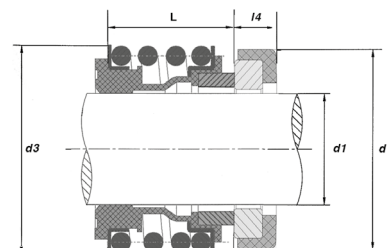

Dimensions mm

SHAFT d1	ROTATING PART		STATIONARY RING		COMPLETE MECHANICAL SEAL	
	d3	L	d7	l4	CODE	€
20	36	21.5	35	7.5	0350220	85.55
25	43	22.5	40.5	8.5	0350225	163.24
30	47	26.5	50.8	12	0350230	181.37
30	47	26.5	47.63	11	0350231	181.37
40	60	30	58	9	0350240	247.66
45	68	32	65.5	12	0350245	325.00
48	70	31.5	67	13	0350248	286.63

MECHANICAL SEALS

PUMPS

EXTRACTOR FANS

MOTORS

INSULATION

EQUIPMENT

MOTOR PARTS

TOOL PARTS

SWITCHES