


TWO PUSH BUTTON PENDANT STATIONS SMALL HOIST P02

*To control motors with 2 drive directions
built according to the standards of maximum safety*

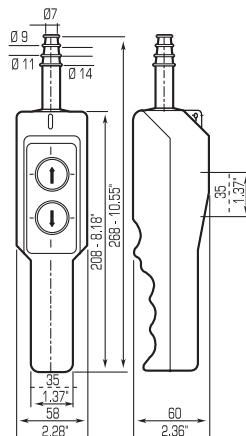

CHARACTERISTICS	CODE	€/pc
1 Speed (P0 2)	3310640	48.45
Direct control for single-phase motors 1 KW (P02 cd)	3310646	83.20

single item packages

GENERAL CHARACTERISTICS:

Protection grade IP 65 in accordance with I.E.C. 529
Operating temperature -25 °C +70 °C

CHARACTERISTICS OF CONTACT ELEMENTS:

Rated thermal current 10A (4) 380V.

Nominal insulation voltage 500 V according to I.E.C. 337.1
Self-extinguishing material.

CONTACT ELEMENTS CERTIFIED BY:



n° E 7193



LISTED-FILE n° 145138



n° 773650



CERTIFIED-FILE n° 919721