

SINGLE ROW PENDANT STATIONS FOR CRANE CONTROL CIRCUITS SERIES PL

For auxiliary service




PL05




PL07



PL08

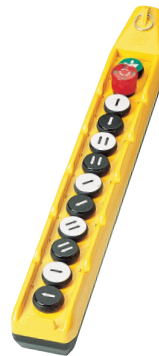

PL12



MODEL	SPEED	N° BUTTONS	A	B	CODE	€/pc
PL05	1	4 OP. + EMERG.	345	288	3310802	134.50
PL07	1	6 OP. + EMERG.	495	358	3310804	167.50
PL08	1	6 OP. + MA./ALL. + EMERGENCY	530	393	3310806*	183.97
PL10	1	8 OP. + MA./ALL. + EMERGENCY	640	463	3310808*	214.55
PL12	1	10 OP. + MA./ALL. + EMERGENCY	710	533	3310810*	235.15
PL004001		NC CONTACT			3200328	9.85
PL004002		NA CONTACT			3200329	9.85

Measurements in mm, packs containing individual pieces
*limited stocks

PL push button stations are built according to Community Directives 73/23 CEE 93/68 CEE.

TECHNICAL DATA:
Protection IP 65
Operating temperature -25 °C +70°C.

Rated insulation voltage 600 V.
Rated current 10 A.

N.B.: "PL" series push button stations can also be provided with two-speed contacts.