

DOUBLE ROW PENDANT STATIONS FOR CRANE CONTROL CIRCUIT PLB

For auxiliary service



PLB 04




PLB 06



PLB 08



PLB 10

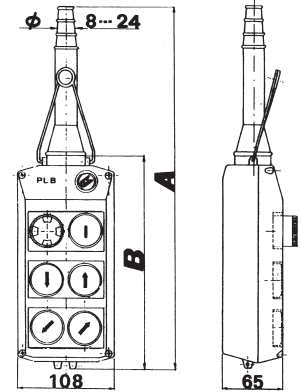

Model	Speed	N° Buttons	A	B	CODE	€/pc
PLB 04	1	2 OP.+MA./ALL. + EMERGENCY	345	185	3310654	117.00
PLB 06	1	4 OP.+MA./ALL. + EMERGENCY	399	239	3310656	151.00
PLB 08	1	6 OP.+MA./ALL. + EMERGENCY	453	293	3310658	196.00
PLB 10	1	8 OP. + MA./ALL. + EMERGENCY	547	347	3310660*	218.05
PLB 12	1	10 OP.+ MA./ALL. + EMERGENCY	601	401	3310662*	249.21
PLB 14	1	12 OP.+MA./ALL. + EMERGENCY	655	455	3310664*	280.42

measurements in mm, packs containing individual pieces

*limited stocks

PLB push button stations are built according to Community Directives 73/23 CEE 93/68 CEE.

TECHNICAL DATA:

protection IP 65

operating temperature -25 °C +70°C.

rated insulation voltage 600 V.
rated current 10 A.

N.B.: "PLB" series push button stations can also be provided with two-speed contacts.