


# MOTOR ROTATION PENDANT STATIONS

*For direct control*



TYPE	CODE	€/pc
SINGLE PHASE - THREE	<b>3310243</b>	<b>157.00</b>
PHASE single item packages		

Version entirely in plastic material. Suitable for controlling three-phase or single-phase motors, with suitable connections to internal fittings.  
Operating power up to 3 Kw for voltage 380 V.~  
Operating power up to 2.2 Kw for voltage 220V.~  
Max voltage 380 V. Insulation voltage 500 V.



Temperature -25° + 70°C.

Spring to return to zero and mechanical safety lock in zero position.  
35 mm projecting shaft for the possible application of a safety limit switch lever.

(connection diagram inside the packaging)

## ACOUSTIC SIGNALS FOR ELECTRIC CONTROL PANELS

*and for: trucks, tractors, forklifts, and  
any industrial purpose.*

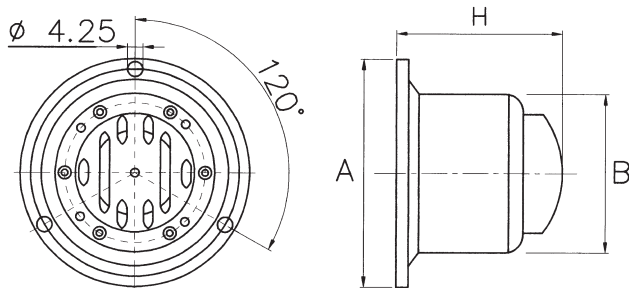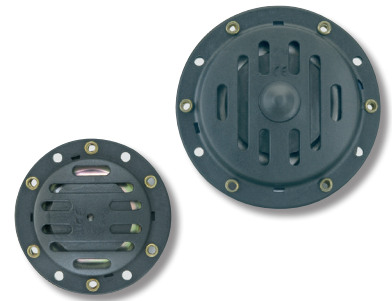

Diameter	Volts	CODE	€/pc
75	24	<b>3310125*</b>	<b>28.23</b>
	48	<b>3310149</b>	<b>29.74</b>
	110	<b>3310111*</b>	<b>48.54</b>
95	220	<b>3310221*</b>	<b>60.46</b>
	48	<b>3310249</b>	<b>56.57</b>
85	110	<b>3310211*</b>	<b>79.25</b>
	220	<b>3310222</b>	<b>79.25</b>

measurements in mm, packs containing individual pieces  
\*limited stocks

SINGLE-TONE HORNS  
FOR CONTINUOUS SERVICE  
protection IP 40, sound level 95 db.