

MECHANICAL SEALS FOR KSB® PUMPS


GRAPHITE/SILICON/FKM

LIQUIBLOK

BQV

Rotation: uni directional right
 Stationary ring: with cup
 Max pressure: 10 bar
 Temperature: -30° max +180°
 for water max +120°

Use: oils, acids, hydrocarbons

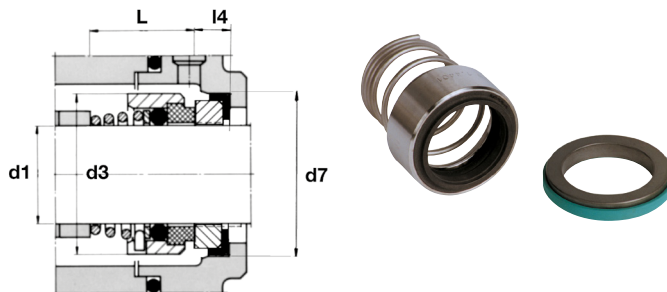

Dimensions mm

| SHAFT d1 | ROTATING PART | | STATIONARY RING | | COMPLETE MECHANICAL SEAL | |
|--------------------|---------------|----------|-----------------|-----------|--------------------------|---------------|
| | d3 | L | d7 | I4 | CODE | € |
| 28 | 40 | 42.5 | 43 | 8 | 0350128 | 101.50 |
| 38 | 53 | 46 | 56 | 9 | 0350138 | 161.00 |
| 48 | 64 | 51 | 66 | 9 | 0350148 | 205.50 |

Suggested for KSB® pumps
 Mechanical seal in alternative to mod. M32-N69

RB 24-G6

GRAPHITE/SILICON/EPDM

LIQUIBLOK

BQE

Temperature: -40° max +150°

Use: superheated water, alcohol, acetate, vapour (no hydrocarbons) with slight presence of abrasives.




WIDIA/WIDIA/EPDM

UUE

Temperature: -40° max +150°

Use: superheated water, alcohol, acetate (no hydrocarbons) with presence of abrasives.

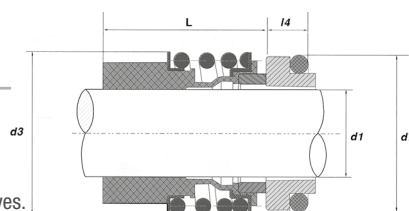

Rotation: bi directional
 Stationary ring: with O-ring
 Max pressure: 10 bar

Dimensions mm

| SHAFT d1 | ROTATING PART | | STATIONARY RING | | GRAPHITE/SILICON/EPDM COMPLETE MECHANICAL SEAL | | WIDIA/WIDIA/EPDM COMPLETE MECHANICAL SEAL | |
|--------------------|---------------|----------|-----------------|-----------|---|---------------|--|---------------|
| | d3 | L | d7 | I4 | CODE | € | CODE | € |
| 28 | 49 | 42.5 | 43 | 7.5 | 0324128 | 128.00 | 0324228 | 188.00 |
| 38 | 58 | 46 | 56 | 9 | 0324138 | 174.00 | 0324238 | 220.00 |
| 48 | 70 | 51 | 66 | 9 | 0324148 | 236.00 | -- | -- |

MECHANICAL SEALS

PUMPS

EXTRACTOR FANS

MOTORS

INSULATION

EQUIPMENT

MOTOR PARTS

TOOL PARTS

SWITCHES