

MECHANICAL SEALS FOR LOWARA® PUMPS GRAPHITE/CERAMIC/NBR

BVP

Use: water, clean liquids without the presence of abrasives

LIQUIBLOK




WIDIA/WIDIA/NBR

UUP

Use: water, clean liquids with the presence of abrasives

Rotation: bi directional
Max pressure: 12 bar
Stationary ring: with cup
Temperature: -25° max +90°

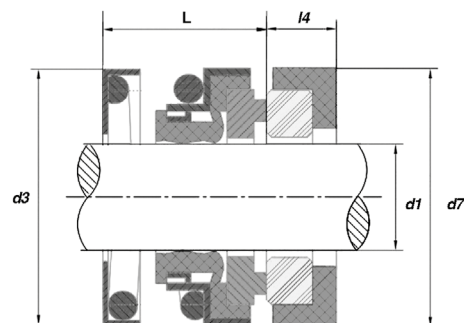

Dimensions mm						CERAMIC/GRAPHITE/NBR		WIDIA/WIDIA/NBR	
SHAFT		ROTATING PART	STATIONARY RING			COMPLETE MECHANICAL SEAL		COMPLETE MECHANICAL SEAL	
d1	d3	L	d7	I4		CODE	€	CODE	€
12	23	16	26	5.5	6	0204012	7.91	--	--
13	33	16	29.7	8	6	0204013	6.01	--	--
14	33	16	29.7	8	6	0204014	6.01	0205014	87.48
15	33	16	29.7	8	6	0204015	6.01	0205015	87.48
16	33	16	29.7	8	6	0204016	6.01	0205016	88.72
20	41	16	42	8	6	0204020	12.93	0205020	137.09
25	48	25	42	7	1	0204025	22.20	0205025	167.79
30	59	35	52	10	1	0204030	56.14	--	--

CUSTOM STATIONARY RING

Dimensions mm					CERAMIC/NBR VP		WIDIA/NBR UP		
SHAFT		STATIONARY RING			STATIONARY RING		SHAFT	STATIONARY RING	
d1	d int.	d7	I4		CODE	€	d1	CODE	€
12	13	26	5.5	6	0254052	1.64	--	--	--
13-14-15-16	17	29.7	8	6	0254054	1.64	14-15	0255051	28.67
16	17	42	9.5	1	0254056	15.78	--	--	--
20	21	42	8	1	0251012	2.64	--	0252011	26.07
25	26	42	7	1	0254058	12.50	25	0255053	70.90
30	33	52	10	1	0254060	31.00	--	--	--

Also see Roten offer for Lowara pumps on page 25