

MECHANICAL SEALS FOR WILO® PUMPS


GRAPHITE/SILICON/EPDM

BQE

Rotation: bi directional
Stationary ring: with cup
Max pressure: 12 bar
Temperature: -40° max +150°

Use: for superheated water, liquids with slight presence of abrasives

LIQUIBLOK

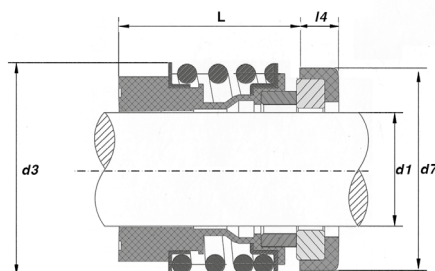

Dimensions mm

SHAFT d1	ROTATING PART		STATIONARY RING		COMPLETE MECHANICAL SEAL	
	d3	L	d7	l4	CODE	€
17	32	20	33	7	0323017	74.10
18	32	30	33	7.5	0323018	44.74
24	42	32.5	39	7.5	0323024	66.78
32	53.5	36	50.8	12	0323032	86.92
43	65	36	61	9	0323043	135.68
55	81	40	76.2	13	0323055	234.26

MECHANICAL SEALS FOR ZENIT® PUMPS


SILICON/SILICON/FKM

QQV

Rotation: bi directional
Stationary ring: with cup
Max pressure: 12 bar
Temperature: -20° max +180° for water max +120°

Use: oils, acids, hydrocarbons, liquids in the presence of abrasives

LIQUIBLOK

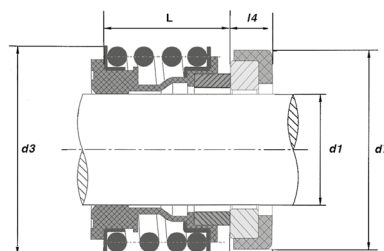

Dimensions mm

SHAFT d1	ROTATING PART		STATIONARY RING		COMPLETE MECHANICAL SEAL	
	d3	L	d7	l4	CODE	€
15	28	17	29.5	8	0380001	74.70
15	28	17	38	8	0380002	74.70
20	36	21.5	35	7.5	0380003	87.45
25	42	23	38	7.5	0380004	115.00
30	47	26.5	45	10	0380005	129.80
35	56	28.5	50	9.5	0380006	213.00