

SUBMERSIBLE MOTOR-DRIVEN PUMPS SERIES SPV



Three-phase motor 230/400 V 50Hz


Class F insulation - Protection IP55

Motor body in aluminium and dip tube in polycarbonate



SPV12 - 18

SPV25-33

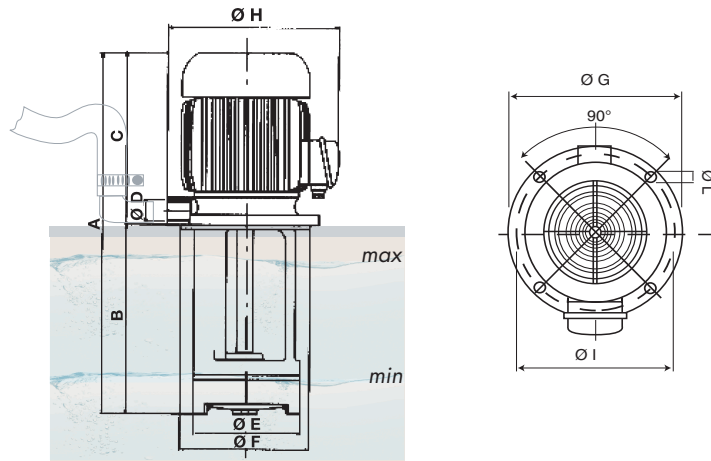

Type	KW	C	ØD gas	ØE	ØF	ØG	H	ØI	ØL	A	B	CODE	€
SPV12	0.15	165	3/4"	98	100	130	151	115	7	255	90	0501120	197.57
										285	120	0501121	
										335	170	0501122	
										385	220	0501123	
										435	270	0501124	210.89
SPV 18	0.17	165	3/4"	98	100	130	151	115	7	515	350	0501125	
										255	90	0501126	206.16
										285	120	0501127	
										335	170	0501128	
										385	220	0501129	219.69
										435	270	0501130	
SPV 25	0.26	210	3/4"	98	100	130	170	115	7	515	350	0501131	334.66
										300	90	0501132	
										330	120	0501133	
										380	170	0501134	
										430	220	0501135	
										480	270	0501136	349.20
										560	350	0501137	

These are suitable for transferring liquids containing impurities of dimensions up to 2-3 mm.
Hydraulic components: impeller, scroll and pump body in PBT mean

it can be used with water, emulsions, and oily substances in general with a viscosity not exceeding 3° Engler (21 CST).
The temperature of the liquid must not exceed 10°C.