

SUBMERSIBLE MOTOR-DRIVEN PUMPS SERIES SPV



Three-phase motor 230/400 V 50Hz

Class F insulation - Protection IP55

Motor body in aluminium and dip tube in polycarbonate







SPV50-75

SPV100-150

Type	KW	C	ØD gas	ØE	ØF	ØG	H	ØI	ØL	A	B	CODE	€
SPV 33	0.36	210	3/4"	98	100	130	170	115	7	300	90	0501138	368.48
										330	120	0501139	
										380	170	0501140	
										430	220	0501141	381.59
										480	270	0501142	
SPV 50	1.00	240	1 1/4"	138	140	180	215	160	9	560	350	0501143	598.21
										460	200	0501144	
										530	270	0501146	
SPV 75	1.25	240	1 1/4"	138	140	180	215	160	9	610	350	0501147	643.90
										460	200	0501153	
										530	270	0501155	
SPV 100	1.01	300	1 1/4"	138	140	180	230	160	9	610	350	0501157	905.96
										500	200	0501169	
										570	270	0501170	
SPV 150	1.41	300	1 1/4"	138	140	180	230	160	9	650	350	0501171	947.42
										500	200	0501174	
										570	270	0501175	
										650	350	0501176	

Packs containing individual pieces, measurements in mm

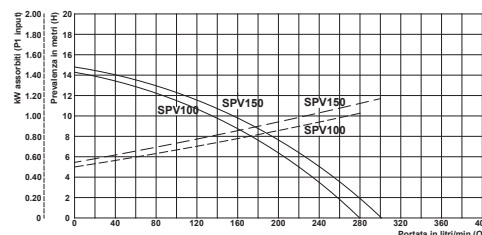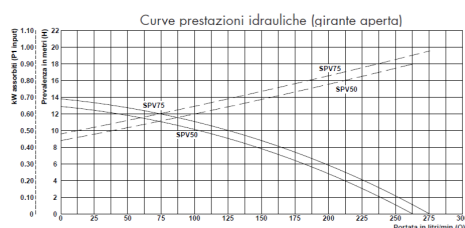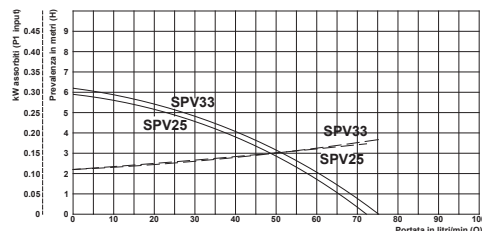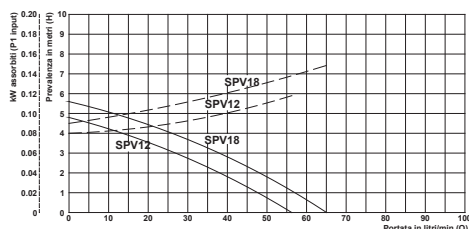

FLOW RATE CURVES The data indicated in the diagrams refer to a viscosity not exceeding 5 CST 20°C