

# SUBMERSIBLE MOTOR-DRIVEN PUMPS SERIES SP



Motor body in aluminium and dip tube in cast iron


Three-phase motor 230/400V 50Hz

Class F insulation - protection IP 55



SP12 - 18

SP25-33

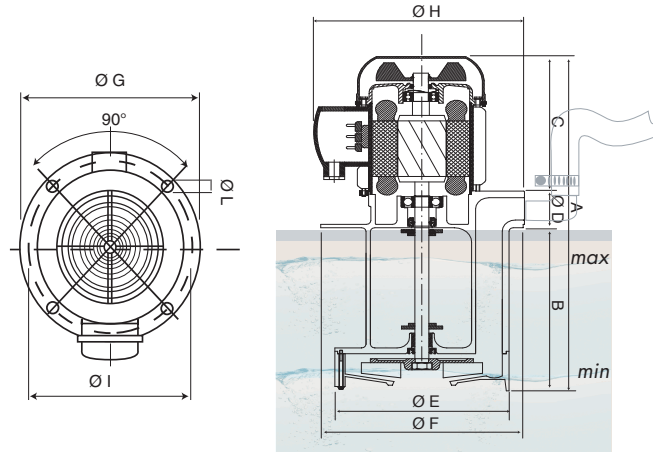

Type	KW	C	ØD gas	ØE	ØF	ØG	H	ØI	ØL	A	B	CODE	€
SP 12	0.15	165	3/4"	98	100	130	151	115	7	265	90	<b>0501070</b>	<b>287.39</b>
										285	120	<b>0501071</b>	
										335	170	<b>0501072</b>	
										385	220	<b>0501073</b>	
										435	270	<b>0501074</b>	
SP 18	0.17	165	3/4"	98	100	130	151	115	7	515	350	<b>0501075</b>	<b>313.85</b>
										265	90	<b>0501076</b>	
										285	120	<b>0501077</b>	
										335	170	<b>0501078</b>	
										385	220	<b>0501079</b>	
SP 25	0.26	215	3/4"	98	100	130	170	115	7	435	270	<b>0501080</b>	<b>304.95</b>
										515	350	<b>0501081</b>	
										305	90	<b>0501082</b>	
										335	120	<b>0501083</b>	
										385	170	<b>0501084</b>	
SP 33	0.36	215	3/4"	98	100	130	170	115	7	485	270	<b>0501085</b>	<b>372.00</b>
										565	350	<b>0501087</b>	
										305	90	<b>0501088</b>	
										335	120	<b>0501089</b>	
										385	170	<b>0501090</b>	
SP 33	0.36	215	3/4"	98	100	130	170	115	7	435	220	<b>0501091</b>	<b>446.37</b>
										485	270	<b>0501092</b>	
										565	350	<b>0501093</b>	
										305	90	<b>0501088</b>	
										335	120	<b>0501089</b>	
SP 33	0.36	215	3/4"	98	100	130	170	115	7	485	270	<b>0501092</b>	<b>456.63</b>
										565	350	<b>0501093</b>	
										305	90	<b>0501088</b>	
										335	120	<b>0501089</b>	
										385	170	<b>0501090</b>	
SP 33	0.36	215	3/4"	98	100	130	170	115	7	435	220	<b>0501091</b>	<b>483.31</b>
										485	270	<b>0501092</b>	
										565	350	<b>0501093</b>	
										305	90	<b>0501088</b>	
										335	120	<b>0501089</b>	

These are suitable for transferring liquids containing impurities of dimensions up to 2-3 mm.

Hydraulic components: impeller and scroll in PBT, pump body in cast iron

mean it can be used with water, emulsions, and oily substances in general with a viscosity not exceeding 3° Engler (21 CST).

The temperature of the liquid must not exceed 10°C.