

# SUBMERSIBLE MOTOR-DRIVEN PUMPS SERIES SP



Motor body in aluminium and dip tube in cast iron  
 Three-phase motor 230/400V 50Hz  
 Class F insulation - protection IP 55







SP50-75

SP100-150

Type	KW	C	ØD gas	ØE	ØF	ØG	H	ØI	ØL	A	B	CODE	€
SP 50	1.00	250	1"1/4	138	140	180	215	160	9	450	200	0501094	598.13
										520	270	0501095	
										600	350	0501096	
										690	440	0501097	627.50
										800	550	0501098	
SP 75	1.20	250	1"1/4	138	140	180	215	160	9	450	200	0501099	643.98
										520	270	0501100	
										600	350	0501101	671.72
										690	440	0501102	
800	550	0501103											
SP 100	1.41	300	1"1/4	138	140	180	230	160	9	500	200	0501104	905.97
										570	270	0501105	
										650	350	0501106	935.61
										740	440	0501107	
850	550	0501108											
SP 150	1.86	300	1"1/4	138	140	180	230	160	9	500	200	0501109	947.23
										570	270	0501110	
										650	350	0501111	979.63
										740	440	0501112	
850	550	0501113											

Packs containing individual pieces, measurements in mm

Available, on request, with impeller and bottom in cast iron, for applications up to 90 °C.

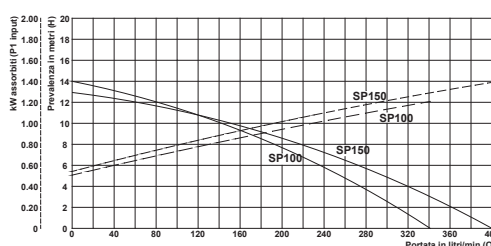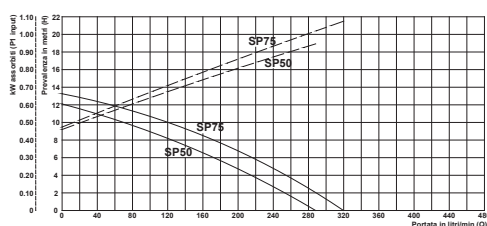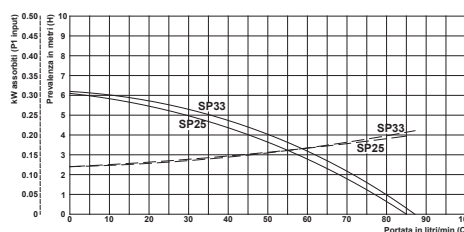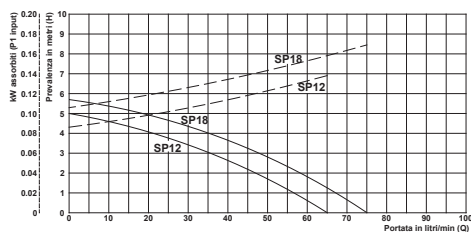

FLOW RATE CURVES The data indicated in the diagrams refer to a viscosity not exceeding 5 CST 20°C