



SUBMERSIBLE MOTOR-DRIVEN PUMPS SERIES MPC

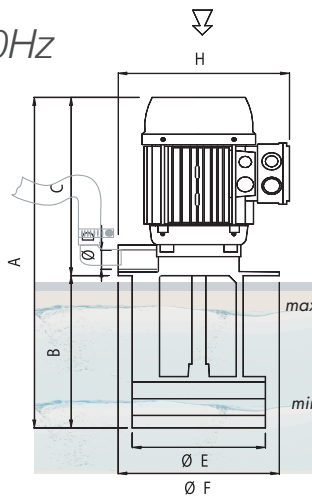

-medium pressure-


Three-phase motor 230/400V 50Hz



TYPE	KW	C	Ø D Gas	Ø E	Ø F	Ø G	H	Ø I	Ø L	A	B	CODE	€
MPC 80B	1.41	280	1"	190		230	245	204	9	490	210	0501230	945.15
										540	260	0501231	
										615	335	0501232	1028.56
										730	450	0501233	
MPC 80C	1.86	280	1"	190		230	245	204	9	520	240	0501234	1021.83
										570	290	0501235	
										645	365	0501236	1105.24
										760	480	0501237	
MPC 90B	2.70	323	1"	190		230	255	204	9	583	260	0501238	1300.75
										633	310	0501239	
										708	385	0501240	1385.47
										823	500	0501241	
MPC 100B	4.85	370	1-1/4"	202	220	250	275	235	9	650	280	0501246	2016.94
										700	330	0501247	
										750	380	0501248	2071.68
										800	430	0501249	
										980	610	0501250	2123.82

Packs containing individual pieces, measurements in mm

Hydraulic components: brass impeller, scroll and pump body in aluminium, mean that it can be used with water, emulsions, and oily substances in general, with viscosity not exceeding 3° Engler (21 CST).
The temperature of the liquid must not exceed 90°C.

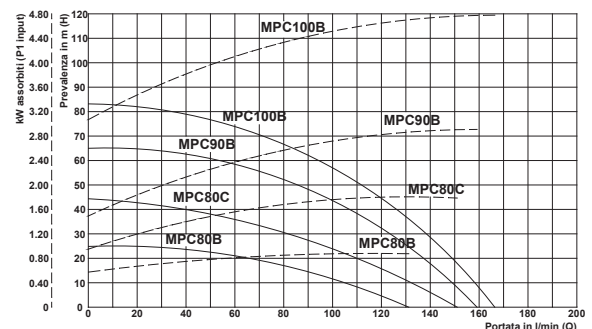

FLOW RATE CURVES The data indicated in the diagrams refer to a viscosity not exceeding 5 CST 20°C