


CENTRIFUGAL MOTOR-DRIVEN PUMPS SERIES EPC

Three-phase motor 230/400V 50Hz



EPC 63-72

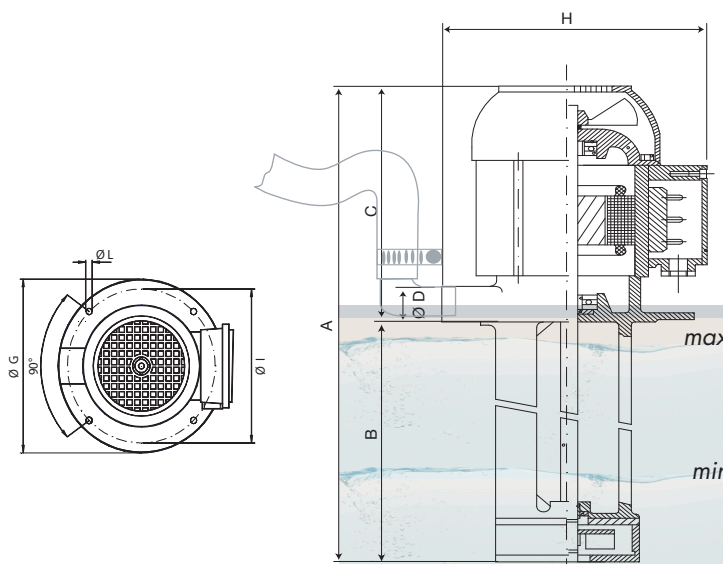

TYPE	KW	C	Ø D	Ø E	Ø F	Ø G	H	Ø I	Ø L	A	B	CODE	€
EPC 63C	0.50	210	3/4"	98	100	130	185	115	7	310	100	0501448	650.40
										340	130	0501449	
										390	180	0501450	679.00
										440	230	0501451	
										490	280	0501452	710.70
EPC 71B	1.20	260	3/4"	98	100	130	193	115	7	570	360	0501453	
										360	100	0501454	813.80
										390	130	0501455	
										440	180	0501456	859.50
										490	230	0501357	
										540	280	0501358	902.50
										620	360	0501359	

These are suitable for transferring clean liquids containing impurities not exceeding 30 µ.

The hydraulic components: brass impeller, scroll and pump body in cast iron allow them to be used with emulsions and oily substances, glycols,

and liquids in general, provided these are not oxidants for the construction materials. The viscosity must not exceed 3° Engler (21 CST).

The temperature of the liquid must not exceed 90°C.