




ELECTRIC PUMPS FOR DECANTING SERIES TR

Three-phase motor 230/400V 50Hz

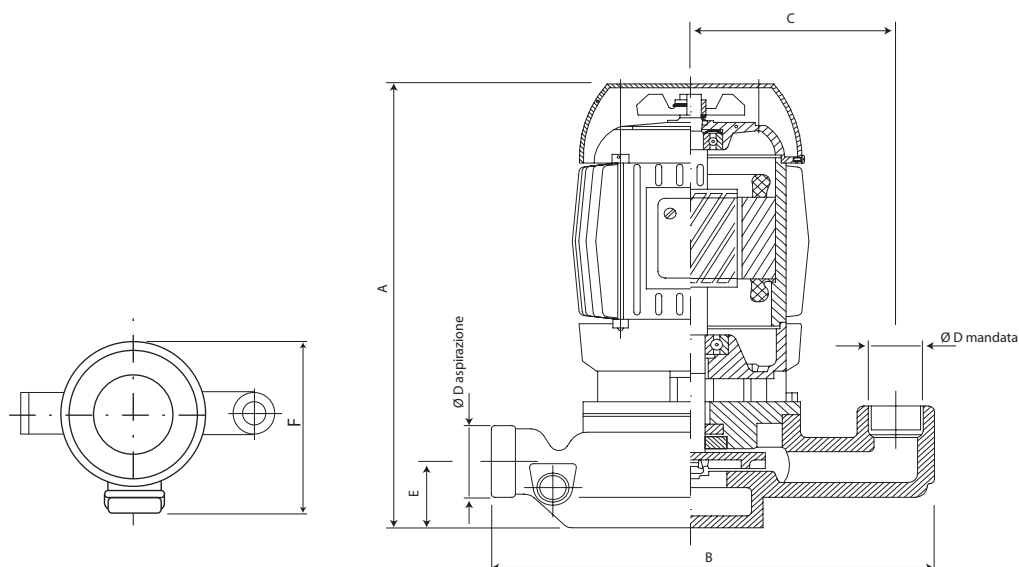

TYPE	Kw	A	B	C	Ø D gas	E	F	CODE	€
TR 71/A	1.00	320	290	130	1"	40	200	0501164	533.24
TR 71/B	1.20	320	290	130	1"	40	200	0501165	583.45
TR 80/A	1.01	370	290	130	1"	40	220	0501166	792.47
TR 80/B	1.41	370	290	130	1"	40	220	0501167	835.30

Packs containing individual pieces, measurements in mm

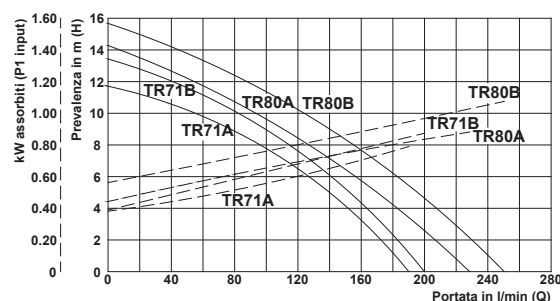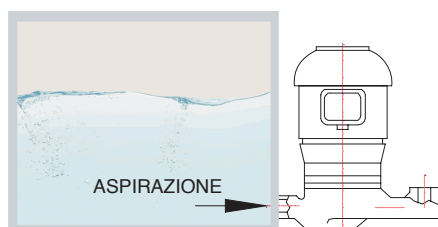

FLOW RATE CURVES The data indicated in the diagrams refer to a viscosity not exceeding 5 CST 20°C

These are suitable for transferring clean liquids containing impurities not exceeding 30 µ.
The hydraulic components: brass impeller, cast iron bottom and aluminium pump body, allow it to be used with emulsions, oily substances and

liquids in general, provided they are not oxidants for the construction materials. The viscosity must not exceed 3° Engler (21 CST) at a maximum temperature of 90° C.