



# CABLE GLANDS BRASS



## CABLE GLAND - PITCH GAS ISO 228/1




P	Ø A (Min-max)	Fixing Hole	B	C	CODE	€/pc
1/4"	5-7	13,5	15	6	<b>3307052</b>	<b>3,33</b>
3/8"	7-9	17	20	6	<b>3307053</b>	<b>4,36</b>
1/2"	11-13	21,5	24	7	<b>3307054</b>	<b>5,50</b>
5/8"	13-15	23,5	26	7	<b>3307055</b>	<b>6,53</b>
3/4"	15-17	27	30	8	<b>3307056</b>	<b>9,88</b>
1"	20-22	33,5	36	9	<b>3307057</b>	<b>10,39</b>
1"1/8	23-25	38	40	11	<b>3307058</b>	<b>12,22</b>
1"1/4	26-32	42	44	11	<b>3307059</b>	<b>14,47</b>
1"1/2	32-35	48	52	11	<b>3307060</b>	<b>17,60</b>
2"	40-42	60	64	13	<b>3307061</b>	<b>27,29</b>
2"1/2	55-57	76	80	20	<b>3307062*</b>	<b>258,48</b>

dimensions in mm Packages: Single items

\* While stocks last

## LOCK-NUT - PITCH GAS ISO 228/1

P	A	H	CODE	€/pc
1/4"	15	3	<b>3307064</b>	<b>0,53</b>
3/8"	19	3	<b>3307065</b>	<b>0,74</b>
1/2"	24	3,5	<b>3307066</b>	<b>0,96</b>
5/8"	27	4	<b>3307067</b>	<b>1,19</b>
3/4"	30	4	<b>3307068</b>	<b>1,38</b>
1"	37	4	<b>3307069</b>	<b>2,03</b>
1" 1/8	41	4,5	<b>3307070</b>	<b>2,25</b>
1" 1/4	45	4,5	<b>3307071</b>	<b>3,27</b>
1" 1/2	52	5,5	<b>3307072</b>	<b>4,30</b>
2"	64	6	<b>3307073</b>	<b>5,05</b>
2" 1/2	83	7	<b>3307074*</b>	<b>30,83</b>

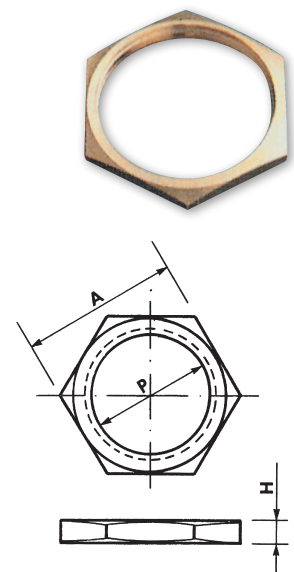

Nickel-plated brass; Packs: single items N.B. The lock nut is always supplied separately, and only when requested.

\* While stocks last

Brass OT 58

Protection level IP 54

Dimensions according to DIN 46 320 standard