


ESTRATTORI DA MURO

CV / KV200 A/B ErP


ÖSTBERG
HEALTHY INDOOR CLIMATE
WITH ENERGY EFFICIENT VENTILATION

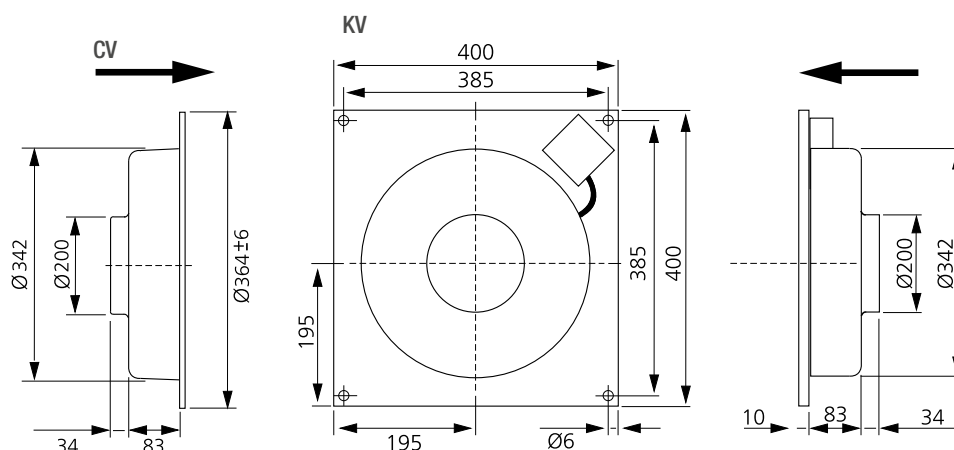

DATI TECNICI

MOD.	V/Hz	A	W	rpm	KG	µF	CLASSE ISOLAM. motore	PROTEZ. motore	COD	€
CV200A	230/50	0,50	115	2580	3,3	4	F	IP 44	0411923	210,00
KVFU 200A	230/50	0,63	144	2500	4,0	5	F	IP 44	0411924	231,00

PRESSIONE/FLUSSO

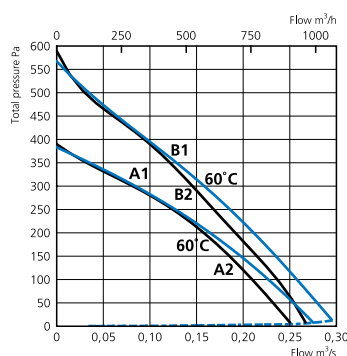

DATI ACUSTICI


CV/KV 200 A, 190 l/s 190 Pa

	L_{pA}	L_{wA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
AMBIENTE	47	54	34	31	42	46	50	47	48	34
INGRESSO		72	52	60	64	67	66	64	65	55

CV/KV 200 B ErP, 160 L/S 300 PA

	L_{pA}	L_{wA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
AMBIENTE	45	52	27	34	41	46	48	44	44	35
INGRESSO		75	57	63	70	69	66	64	61	59

POTENZA/FLUSSO



DESCRIZIONE:

Ventilatori da parete per tubi a sezione circolare, con o senza piastra quadrata.

T MAX aria trasportata in gradi centigradi = 60.